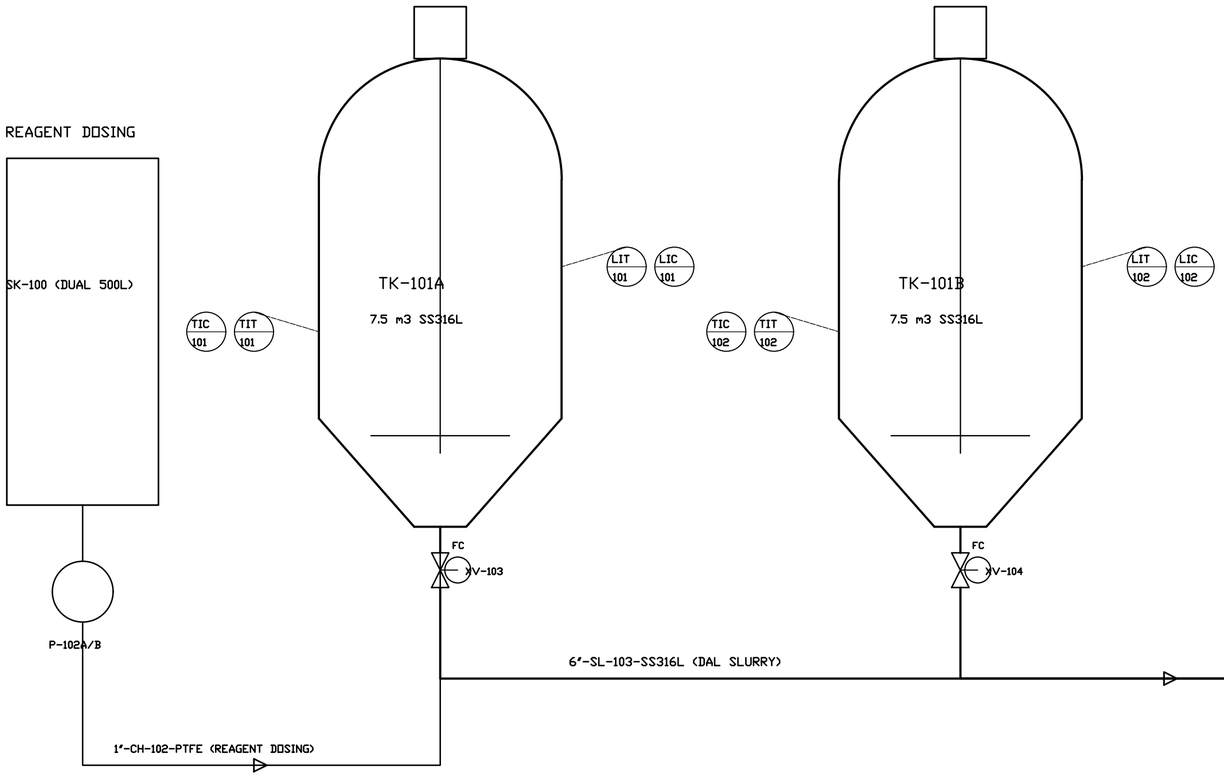


TAG NO	SERVICE	LINE / VESSEL	TRANSMITTER	CONTROLLER	FINAL CONTROL ELEMENT	INTERLOCK LOGIC & CONTROL NARRATIVE
LIC-101A	Soak Tank A Level	TK-101A	Diff Pressure LT-101A	PLC PID Loop	Pneumatic XV-101A	Auto cut-off water inlet at 85% batch level; LAH interlock alarm.
TIC-101A	Soak Tank A Temp	TK-101A	Duplex RTD TT-101A	PLC PID Loop	Modulating TCV-101A	Maintains 30.0 deg C +/- 1 deg C via steam injection coil; TAH trip.
AIC-101	Chemical Dosing pH	Dosing Line	Online pH AT-101	PLC Ratio Controller	VFD Metering Pump P-102	Paces reagent stroke volume proportional to batch water filling rate.
ZIC-103	Bottom Dump Knife	TK-101A Drain	Limit Switches ZT-103	PLC Sequence State	Air Piston Actuator XV-103	Interlocked with Dewatering Screen SC-101 run signal; prevents flood.
PIC-101	Vessel Dome Relief	TK-101A Vent	Press Trans PIT-101	Direct Acting PSV	Spring Loaded PSV-101	Protects vessel against overpressure / vacuum collapse during dump.

FINNOAQ AGRO-INDUSTRIAL TECHNOLOGIES LTD.
15,000 kg/day Split Pigeon Pea Optimization Greenfield Project

P&ID - RAPID HYDRATION SOAK BATTERY & DOSING SKID
DISCIPLINE: PIPING | LEAD: SOURISH SENAPATI | GUIDANCE: DR. ARCHISMAN RAY (IIT KGP)

DWG NO: DWG-FIN-15T-003	REV: V8.0	SHEET: 3 OF 12
SCALE: AS SHOWN DATE: 2026-10-17	STATUS: PRELIMINARY	GATE: G-A HOLD

CONCEPTUAL FEED - PRELIMINARY - NOT FOR CONSTRUCTION / NOT FOR PROCUREMENT | COPYRIGHT FINNOAQ