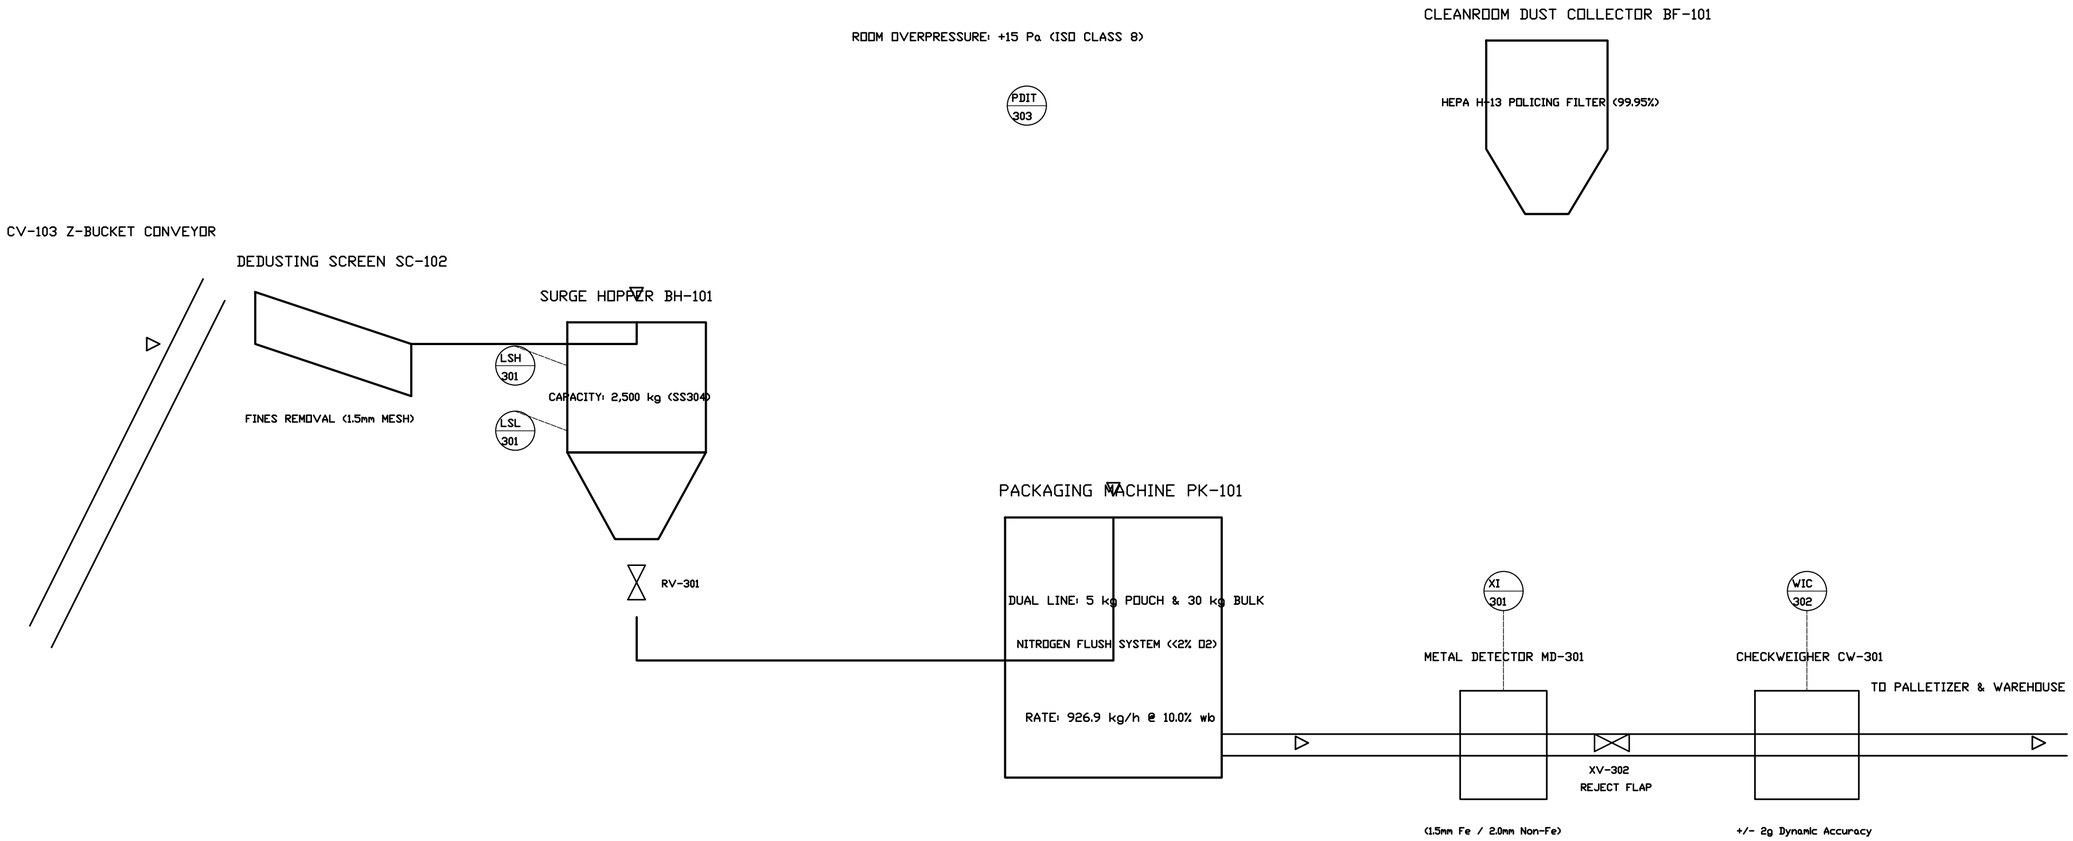


PACKAGING HACCP CRITICAL CONTROL POINTS (CCP-1 & CCP-2):

1. CCP-1 (Metal Detection): MD-301 audited every 2h with certified test wands (1.5mm Fe, 2.0mm Non-Fe, 2.5mm SS).

2. Any metal trip immediately triggers pneumatic reject flap XV-302 and halts infeed conveyor CV-103.

3. CCP-2 (Moisture Verification): Final packaged product moisture locked @ 10.0% +/- 0.5% wet-basis.

4. Nitrogen Gas Flush: Residual headspace oxygen < 2.0% to guarantee 12-month shelf life without lipid oxidation.

5. ISO Class 8 Cleanroom: Differential pressure > +15 Pa maintained against raw warehouse to prevent cross-contamination.

PACKAGING EQUIPMENT SPECIFICATIONS & LINE RATINGS:

PK-101A (Retail Line): Vertical Form-Fill-Seal (VFFS) machine | 5.0 kg standup laminate pouches @ 25 bpm.

PK-101B (Bulk Line): Automatic open-mouth bagging machine | 30.0 kg HDPE-lined woven sacks @ 6 bpm.

MD-301: Aperture 450mm x 150mm | Multi-frequency digital signal processing | IP66 washdown SS304.

CW-301: Dynamic strain-gauge load cell | Belt speed 35 m/min | Auto tare & zero tracking | Reject: Air blast.

BF-101: 2,500 m3/h dedicated cleanroom exhaust filter | 24 antistatic cartridges + H-13 HEPA module | 3.0 kW.

FINNOAQ AGRO-INDUSTRIAL TECHNOLOGIES LTD.

15,000 kg/day Split Pigeon Pea Optimization Greenfield Project

P&ID - PACKAGING LINE & CLEANROOM DEDUSTING

DISCIPLINE: PIPING | LEAD: SOURISH SENAPATI | GUIDANCE: DR. ARCHISMAN RAY (IIT KGP)

DWG NO: DWG-FIN-15T-006	REV: V8.0	SHEET: 6 OF 13
SCALE: AS SHOWN DATE: 2026-10-17	STATUS: PRELIMINARY	GATE: G-A HOLD

CONCEPTUAL FEED - PRELIMINARY - NOT FOR CONSTRUCTION / NOT FOR PROCUREMENT | COPYRIGHT FINNOAQ