
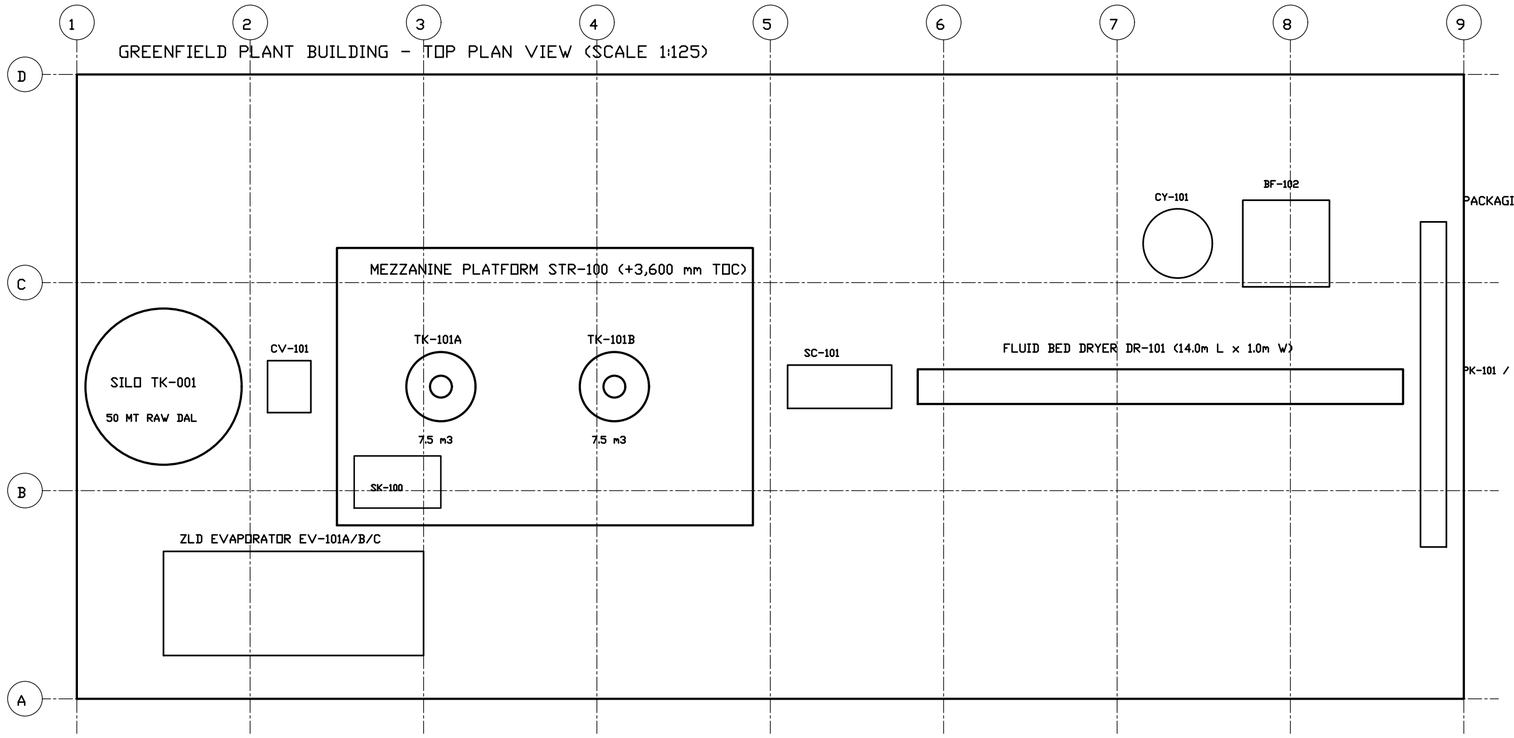


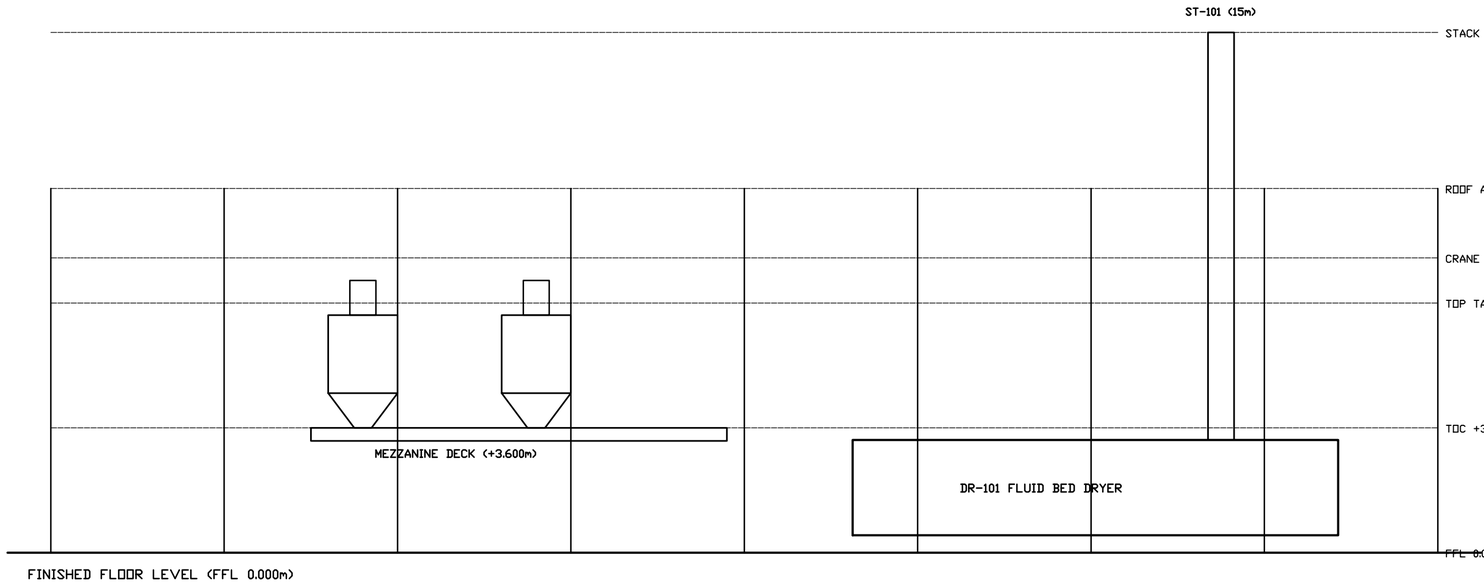

MASTER EQUIPMENT SCHEDULE & OPERATING WEIGHTS:

TK-001: Raw Grain Silo (50 MT)
Dim: Dia 4,500 x 6,500 | Elev: 0.000m
Weight: 58,500 kg | Power: 2.2 kW | MOC: Carbon Steel

CV-101: Bucket Elevator
Dim: 1,000 x 1,200 x 9,000 | Elev: 0.000m
Weight: 1,850 kg | Power: 3.7 kW | MOC: SS304 Contact

SC-100: Grain Cleaner & Destoner
Dim: 2,200 x 1,400 x 1,600 | Elev: 0.000m
Weight: 950 kg | Power: 2.2 kW | MOC: SS304 Casing

TK-101A: Soak Vessel A (7.5 m3)
Dim: Dia 2,000 x 3,450 | Elev: +3.600m
Weight: 9,850 kg | Power: 4.0 kW | MOC: AISI SS316L

TK-101B: Soak Vessel B (7.5 m3)
Dim: Dia 2,000 x 3,450 | Elev: +3.600m
Weight: 9,850 kg | Power: 4.0 kW | MOC: AISI SS316L

SK-100: Chemical Dosing Skid
Dim: 2,400 x 1,400 x 1,900 | Elev: +3.600m
Weight: 1,450 kg | Power: 1.5 kW | MOC: HDPE / SS316L

SC-101: Dewatering Screen
Dim: 3,000 x 1,200 x 1,200 | Elev: +3.600m
Weight: 1,250 kg | Power: 3.0 kW | MOC: AISI SS316L

DR-101: Fluid Bed Dryer
Dim: 14,000 x 1,000 x 2,800 | Elev: 0.000m
Weight: 6,850 kg | Power: 6.0 kW | MOC: AISI SS304

HE-101: Steam Air Heater
Dim: 1,800 x 1,200 x 1,500 | Elev: 0.000m
Weight: 1,200 kg | Power: N/A | MOC: Al-Finned SS

BL-101: Primary Air Blower
Dim: 1,600 x 1,400 x 1,400 | Elev: 0.000m
Weight: 680 kg | Power: 18.5 kW | MOC: Carbon Steel

CY-101: Cyclone Separators (2x)
Dim: Dia 1,200 x 4,000 | Elev: 0.000m
Weight: 1,700 kg | Power: N/A | MOC: AISI SS304

BF-102: Dust Collector Baghouse
Dim: 2,800 x 2,200 x 4,800 | Elev: 0.000m
Weight: 2,450 kg | Power: N/A | MOC: Carbon Steel

PK-101: Packaging Machine Line
Dim: 4,500 x 2,000 x 3,200 | Elev: 0.000m
Weight: 3,200 kg | Power: 7.5 kW | MOC: AISI SS304

EV-101: Triple Effect ZLD Evap
Dim: 7,500 x 3,000 x 4,500 | Elev: 0.000m
Weight: 5,500 kg | Power: 11.0 kW | MOC: AISI SS316L

TR-01: Substation Transformer
Dim: 2,200 x 1,600 x 2,000 | Elev: 0.000m
Weight: 2,800 kg | Power: 500 kVA | MOC: Oil Immersed

DG-01: Standby Generator Yard
Dim: 3,500 x 1,500 x 2,200 | Elev: 0.000m
Weight: 3,500 kg | Power: 200 kW | MOC: Acoustic Encl

DESIGN CODES & CIVIL STANDARDS:

1. Civil Foundation: Safe bearing capacity 180 kN/m2 | IS 456 M25 grade concrete.
2. Structural Steel: IS 800:2007 | Columns ISMB 400 | Mezzanine Beams ISMB 300.
3. Design Loads: Process Mezzanine: 7.5 kN/m2 | Ground Floor: 25.0 kN/m2.
4. Total Operating Equipment Weight: 111.6 Tonnes (including grain & liquor fill).
5. Total Plant Structural Steel Weight: 27.08 Tonnes (Platforms, Ladders, Handrails).
6. Safety & Ergonomics: OSHA 1910.29 compliant walkways (1,000mm clear width).

FINNOAQ AGRO-INDUSTRIAL TECHNOLOGIES LTD.
15,000 kg/day Split Pigeon Pea Optimization Greenfield Project

PLANT GENERAL ARRANGEMENT MASTER LAYOUT
DISCIPLINE: GENERAL ARRANGEMENT | LEAD: SOURISH SENAPATI | GUIDANCE: DR. ARCHISMAN RAY (IIT KGP)

DWG NO: DWG-FIN-15T-014	REV: V8.0	SHEET: 13 OF 13
SCALE: AS SHOWN DATE: 2026-10-17	STATUS: PRELIMINARY	GATE: G-A HOLD

CONCEPTUAL FEED – PRELIMINARY – NOT FOR CONSTRUCTION / NOT FOR PROCUREMENT | COPYRIGHT FINNOAQ