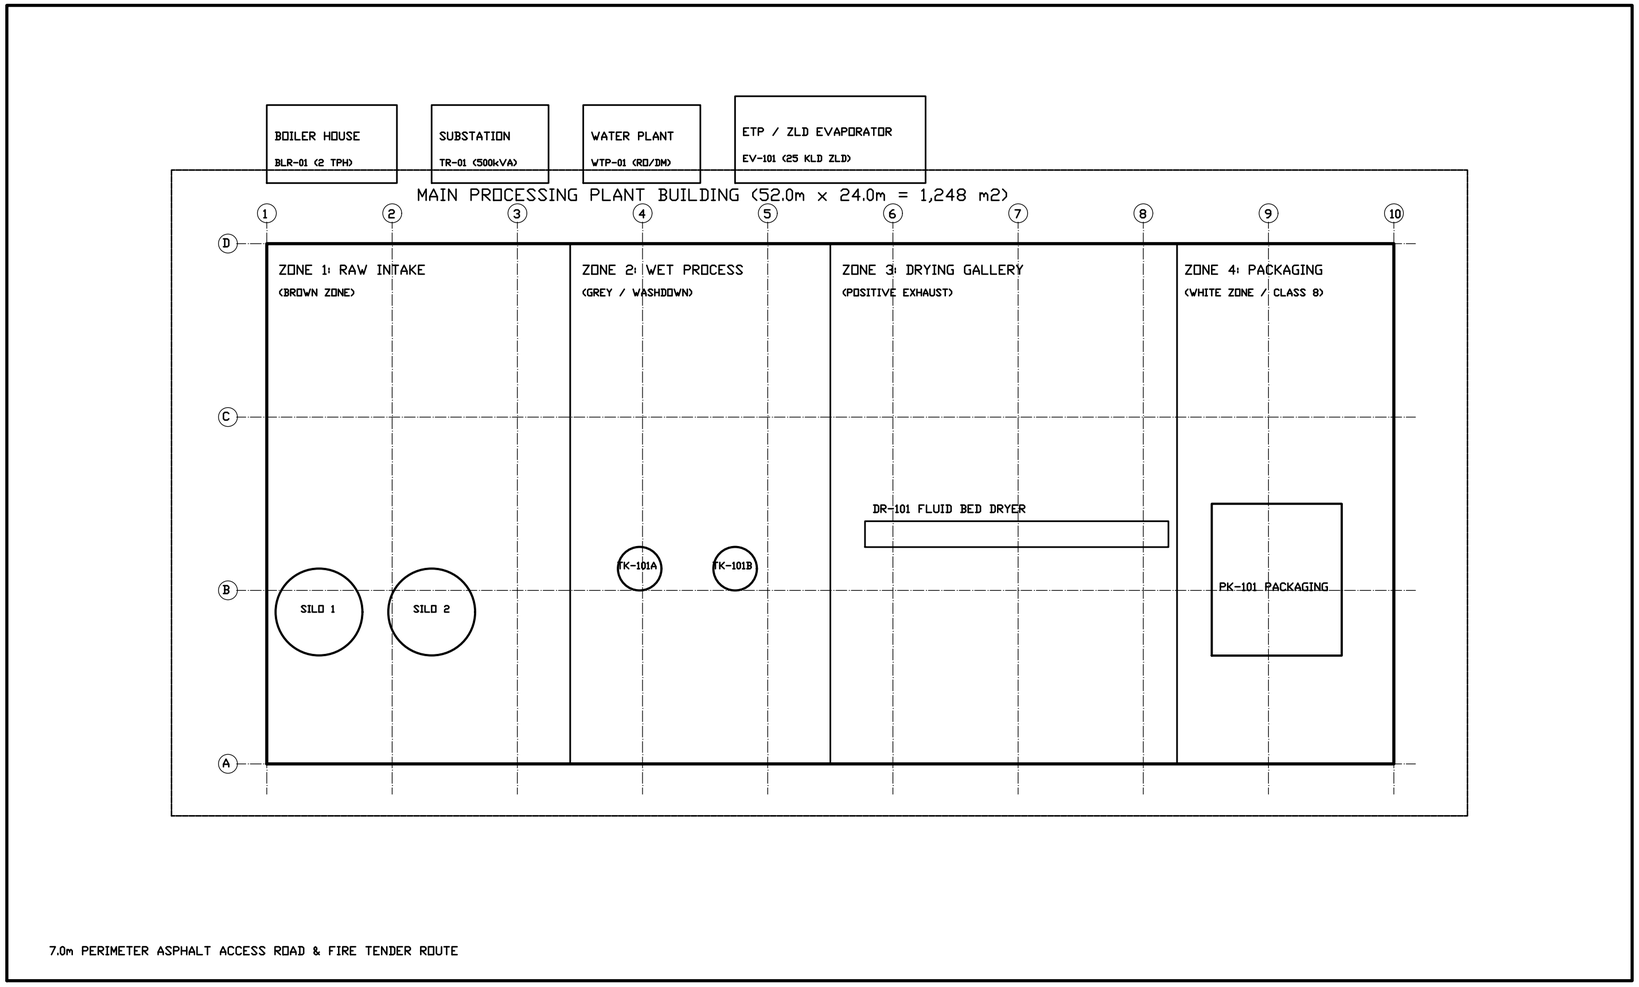


N

SITE AREA ALLOCATION & MASTER METRICS:

1. Total Greenfield Plot: 3,375.0 m2 (75.0m x 45.0m).
2. Main Processing Building: 1,248.0 m2 (52.0m x 24.0m).
3. Building Ground Coverage: 36.98% (Permissible: 50.0%).
4. Floor Area Ratio (FAR): 0.42 (Permissible: 1.50).
5. External Utility Yard: 380.0 m2 (Boiler, Substation, ETP).
6. Asphalt Roads & Parking: 1,215.0 m2 (Heavy vehicle turning).
7. Green Belt & Landscaping: 532.0 m2 (15.76% plot area).
8. Finished Floor Elevation: +600 mm above finished site grade.
9. Clear Eaves Height: 8.50 m (Apex Height: 10.20 m PEB structure).
10. Structural Bays: 9 bays @ 5.78m longitudinal, 3 @ 8.0m transverse.

HYGIENIC ZONING & HVAC PRESSURIZATION SCHEDULE:

ZONE 1 (BROWN ZONE) - RAW INTAKE & STORAGE:

* Area: 336.0 m2 | Pressurization: Neutral (0 Pa) | 6 ACH Exhaust.
* Surface: Anti-abrasion floor, dust extraction hoods on chutes.

ZONE 2 (GREY ZONE) - RAPID HYDRATION & CHEMICAL TREATMENT:

* Area: 288.0 m2 | Pressurization: Neutral to -5 Pa | 10 ACH.
* Surface: Polyurethane screed floor (R11 slip), stainless drains.
* Washdown: 100% wet cleaning compatible, coved wall joints.

ZONE 3 (GREY / DRY ZONE) - THERMAL FLUID BED DRYING GALLERY:

* Area: 384.0 m2 | Pressurization: +5 Pa (Prevent raw dust ingress).
* Air Handling: Filtered dry make-up air, acoustic enclosures.

ZONE 4 (WHITE ZONE) - SECONDARY PACKAGING & FINISHED GOODS:

* Area: 240.0 m2 | Cleanliness: ISO 14644-1 Class 8 Cleanroom.
* Pressurization: +15 Pa Positive Differential (Overpressure).
* Air Filtration: Central AHU with 99.99% HEPA H14 terminal units.
* Personnel Entry: Dual-door interlocked airlock with sticky mats.

LIFE SAFETY, EGRESS & EXPLOSION COMPLIANCE:

* NFPA 68 burst panel discharge ducts through roof (DR-101).
* 4x Fire egress doors with panic hardware leading to ring road.

FINNOAQ AGRO-INDUSTRIAL TECHNOLOGIES LTD.
15,000 kg/day Split Pigeon Pea Optimization Greenfield Project

SITE MASTER PLOT PLAN & HYGIENIC ZONING
DISCIPLINE: CIVIL/LAYOUT | LEAD: SOURISH SENAPATI | GUIDANCE: DR. ARCHISMAN RAY (IIT KGP)

DWG NO: DWG-FIN-15T-004	REV: V8.0	SHEET: 4 OF 12
SCALE: AS SHOWN DATE: 2026-10-17	STATUS: PRELIMINARY	GATE: G-A HOLD

CONCEPTUAL FEED - PRELIMINARY - NOT FOR CONSTRUCTION / NOT FOR PROCUREMENT | COPYRIGHT FINNOAQ