
KEY PROCESS DESIGN BASIS & THERMODYNAMIC OPERATING PARAMETERS:

Throughput: 15,000 kg/day as-fed Dal | Operating Schedule: 16.0 h/day (Mean 937.5 kg/h, Design 1,102.9 kg/h @ 85% OEE)

Infeed Moisture: 10.50% w.b. (839.06 kg/h dry solids) | Product Moisture: 10.00% w.b. (926.90 kg/h saleable dal) | Solids Yield: 99.40%

Soak Liquor Ratio: 1.50 : 1.00 (Water:Dal) | Dosing Reagent: Food-Grade NaHCO3 / Citrate | Drying Air: 85 deg C | Deck Area: 14.0 m2

All Product-Contact Metallurgy: AISI SS316L 2B Sanitary Polish (Ra <= 0.8 um) | CIP / Washdown Compatible | ZLD Effluent Evaporation

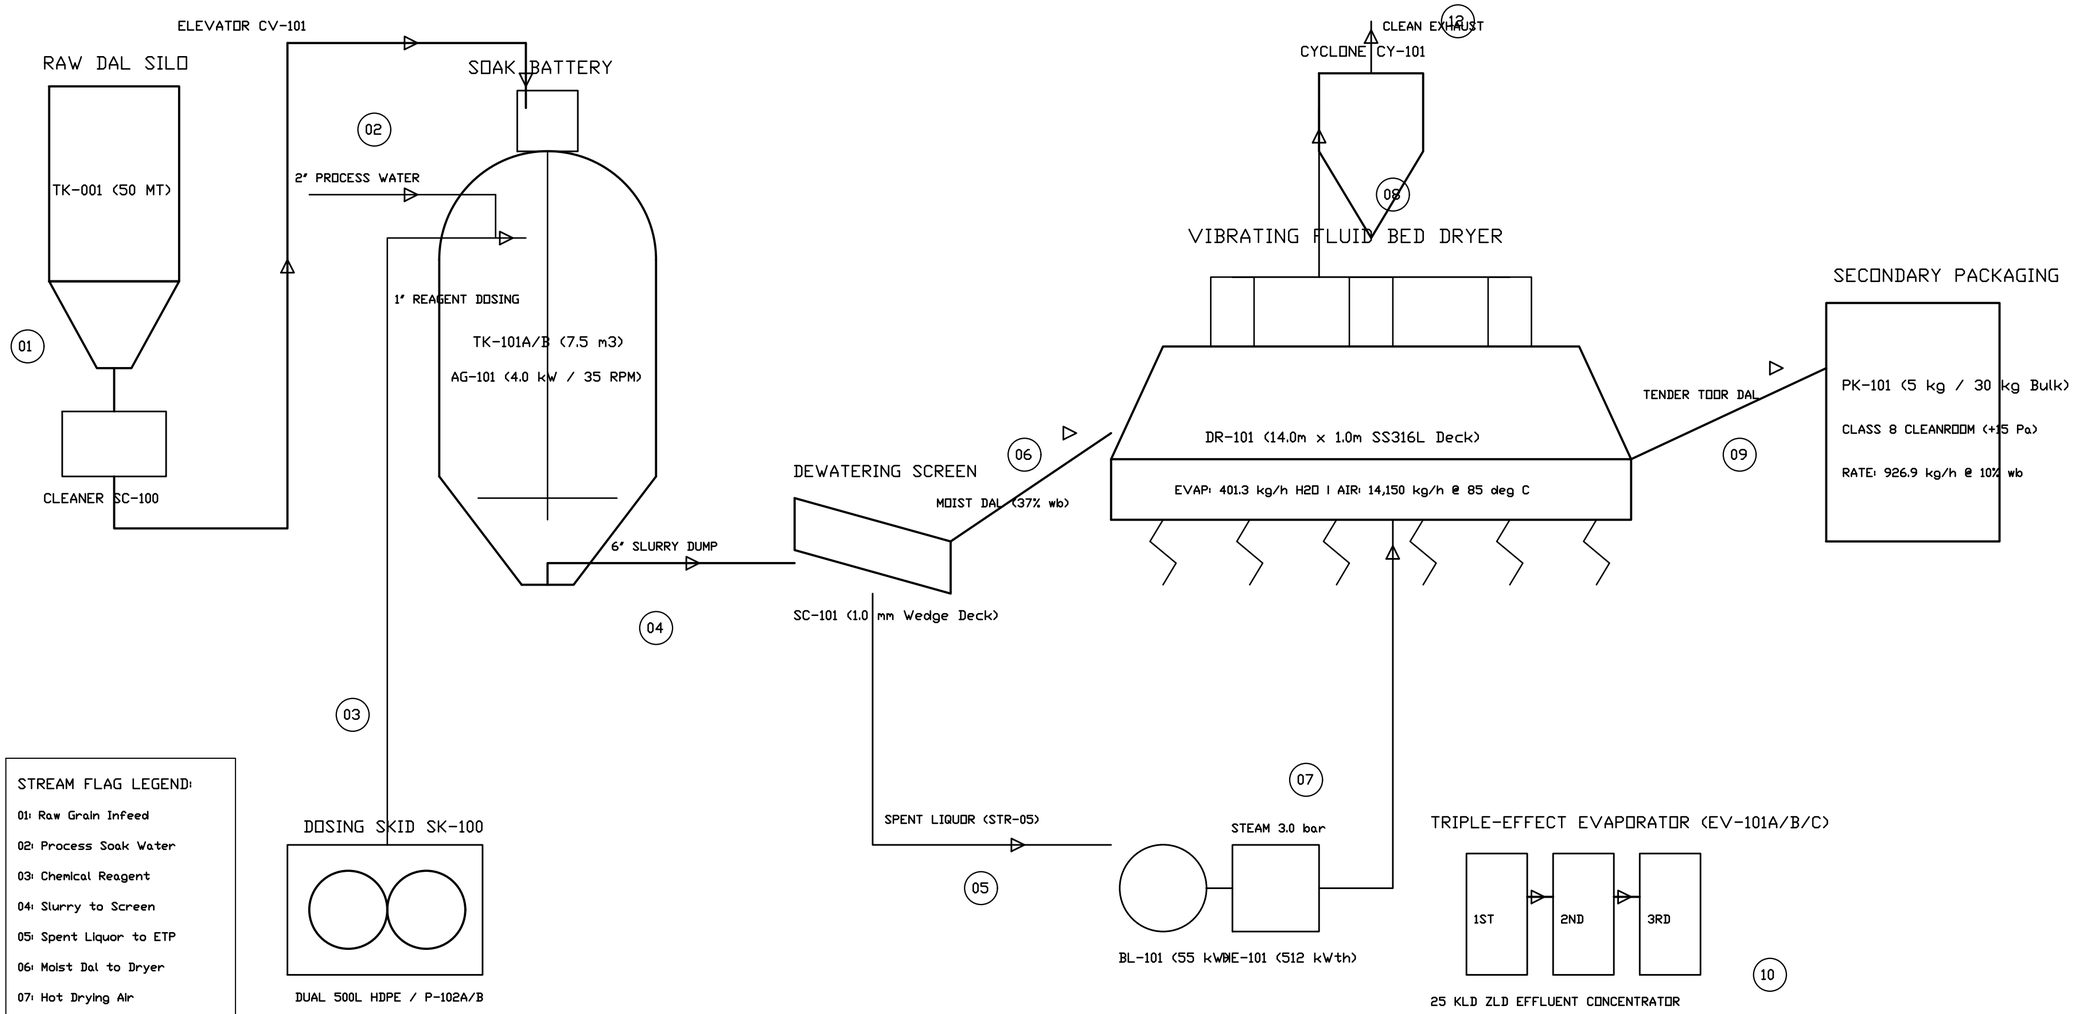

STREAM FLAG LEGEND:

- 01: Raw Grain Infeed
- 02: Process Soak Water
- 03: Chemical Reagent
- 04: Slurry to Screen
- 05: Spent Liquor to ETP
- 06: Moist Dal to Dryer
- 07: Hot Drying Air
- 09: Saleable Toor Dal

FINNOAQ AGRO-INDUSTRIAL TECHNOLOGIES LTD.		
15,000 kg/day Split Pigeon Pea Optimization Greenfield Project		
PROCESS FLOW DIAGRAM - OVERALL PLANT		
DISCIPLINE: PROCESS | LEAD: SOURISH SENAPATI | GUIDANCE: DR. ARCHISMAN RAY (IIT KGP)		
DWG NO: DWG-FIN-15T-001	REV: V8.0	SHEET: 1 OF 12
SCALE: AS SHOWN DATE: 2026-10-17	STATUS: PRELIMINARY	GATE: G-A HOLD

CONCEPTUAL FEED - PRELIMINARY - NOT FOR CONSTRUCTION / NOT FOR PROCUREMENT | COPYRIGHT FINNOAQ

STR	STREAM DESCRIPTION	SOURCE	DESTINATION	TOTAL (kg/h)	SOLIDS (kg/h)	WATER (kg/h)	MOIST (%wb)	T (degC)	P (bar g)	PHASE	VOL (m3/h)
01	Raw Split Pigeon Pea Infeed	Silo TK-001	Elevator CV-101	937.50	839.06	98.44	10.50%	28.0	ATM	Solid Granular	1.17
02	Treated Soft Process Water	Water Plant WTP-01	Soak Battery TK-101	1,406.25	0.00	1,406.25	100.00%	30.0	2.00	Liquid	1.41
03	Reagent Dosing Solution (10%)	Dosing Skid SK-100	Soak Battery TK-101	14.06	1.41	12.65	90.00%	28.0	3.00	Aqueous Soln	0.01
04	Hydrated Dal Slurry Discharge	Soak Battery TK-101	Screen SC-101	2,357.81	840.47	1,517.34	64.35%	30.0	0.20	Solid-Liquid	2.14
05	Separated Spent Soak Liquor	Screen SC-101	Equalization TK-104	1,018.75	6.44	1,012.31	99.37%	30.0	ATM	Turbid Liquid	1.02
06	Moist Dewatered Dal to Dryer	Screen SC-101	Fluid Bed DR-101	1,339.06	834.03	505.03	37.72%	30.0	ATM	Wet Particulate	1.58
07	Hot Conditioned Drying Air	Air Heater HE-101	Plenum DR-101	14,150.00	0.00	155.65	1.10% db	85.0	0.03	Gas	11,800.0
08	Moist Vapour Exhaust Air	Dryer Hood DR-101	Cyclone CY-101	14,551.31	10.60	556.96	3.83% db	62.0	-0.01	Dusty Gas	12,950.0
09	Finished Tender Toor Dal	Dryer DR-101	Packaging PK-101	926.90	834.21	92.69	10.00%	35.0	ATM	Solid Granular	1.16
10	Evaporator Clean Condensate	Condenser HE-103	Water Tank TK-105	980.00	0.00	980.00	100.00%	45.0	ATM	Distillate Liq	0.99
11	ZLD Concentrate Effluent	3rd Effect EV-101C	Solar Pan / Bagging	38.75	15.50	23.25	60.00%	55.0	0.50	Heavy Slurry	0.03
12	Cyclone Separated Fines	Cyclone CY-101	Packaging Recycle	10.60	9.54	1.06	10.00%	58.0	ATM	Fine Powder	0.02

MASS BALANCE RECONCILIATION & SOLIDS CONSERVATION AUDIT:

1. DRY SOLIDS CONSERVATION CHECK: Exact 0.0000% mathematical closure across entire flowsheet.
   - Raw Grain Solids Infeed (Stream 01): 839.06 kg/h (100.000% basis).
   - Chemical Reagent Active Minerals (Stream 03): 1.41 kg/h.
   - Product Saleable Solids Output (Stream 09): 834.21 kg/h (99.42% solids yield).
   - Spent Liquor Soluble Losses (Stream 05): 6.26 kg/h (0.75% leaching).
   - Total Output Solids = 834.21 + 6.26 = 840.47 kg/h == Total Input Solids (839.06 + 1.41 = 840.47 kg/h).
2. WATER EVAPORATION DUTY IN FLUID BED DRYER DR-101:
   - Moisture Inflow (Stream 06): 505.03 kg/h | Moisture Outflow (Stream 09): 92.69 kg/h.
   - Net Water Evaporation Rate: 412.34 kg/h H2O @ 85 deg C drying air.
3. ZERO LIQUID DISCHARGE (ZLD) EFFLUENT RECOVERY:
   - Spent Liquor Inflow to Evaporator: 1,018.75 kg/h (99.37% water).
   - Distillate Clean Water Recycled (Stream 10): 980.00 kg/h (96.20% volumetric recovery).
   - Heavy Mineral Concentrate Bleed (Stream 11): 38.75 kg/h (40.0% solids slurry to solar pan).

THERMAL ENERGY, STEAM CONSUMPTION & ELECTRICAL POWER SCHEDULE:


1. LOW PRESSURE STEAM DUTY (3.0 bar g saturated, 143.6 deg C, h_fg = 2,133 kJ/kg):
   - Air Heater HE-101 (Fluid Bed Dryer): 512.4 kWth -> Steam Consumption: 864.5 kg/h.
   - Triple-Effect Calandria EV-101A: 285.6 kWth -> Motive Steam Consumption: 481.8 kg/h.
   - Total Continuous Steam Demand: 1,346.3 kg/h (1.35 TPH @ design load).
   - Recommended Boiler Capacity: 2.0 TPH packaged biomass / dual-fuel boiler.
2. ELECTRICAL POWER DEMAND (415V, 3-Phase, 50 Hz):
   - Total Plant Connected Load: 184.5 kW | Operating Diversity Factor: 0.70.
   - Maximum Continuous Running Demand: 129.2 kW (131.8 kVA @ 0.98 corrected PF).
   - Substation Transformer TR-01: 500 kVA (26.4% utilization, ample Phase 2 margin).
   - Standby Emergency Generator DG-01: 250 kVA (100% full plant backup).
3. COOLING WATER & COMPRESSED AIR UTILITIES:
   - Surface Condenser HE-103 Cooling Water: 45.0 m3/h @ 32 deg C supply / 38 deg C return.
   - Plant Compressed Air: 120 Nm3/h @ 7.0 bar g (Oil-free screw compressor for instrumentation).

CONCEPTUAL FEED - PRELIMINARY - NOT FOR CONSTRUCTION / NOT FOR PROCUREMENT | COPYRIGHT FINNOAQ

FINNOAQ AGRO-INDUSTRIAL TECHNOLOGIES LTD.
15,000 kg/day Split Pigeon Pea Optimization Greenfield Project

PROCESS STREAM TABLE & MASS-ENERGY BALANCE
DISCIPLINE: PROCESS | LEAD: SOURISH SENAPATI | GUIDANCE: DR. ARCHISMAN RAY (IIT KGP)

DWG NO: DWG-FIN-15T-002	REV: V8.0	SHEET: 2 OF 12
SCALE: AS SHOWN DATE: 2026-10-17	STATUS: PRELIMINARY	GATE: G-A HOLD

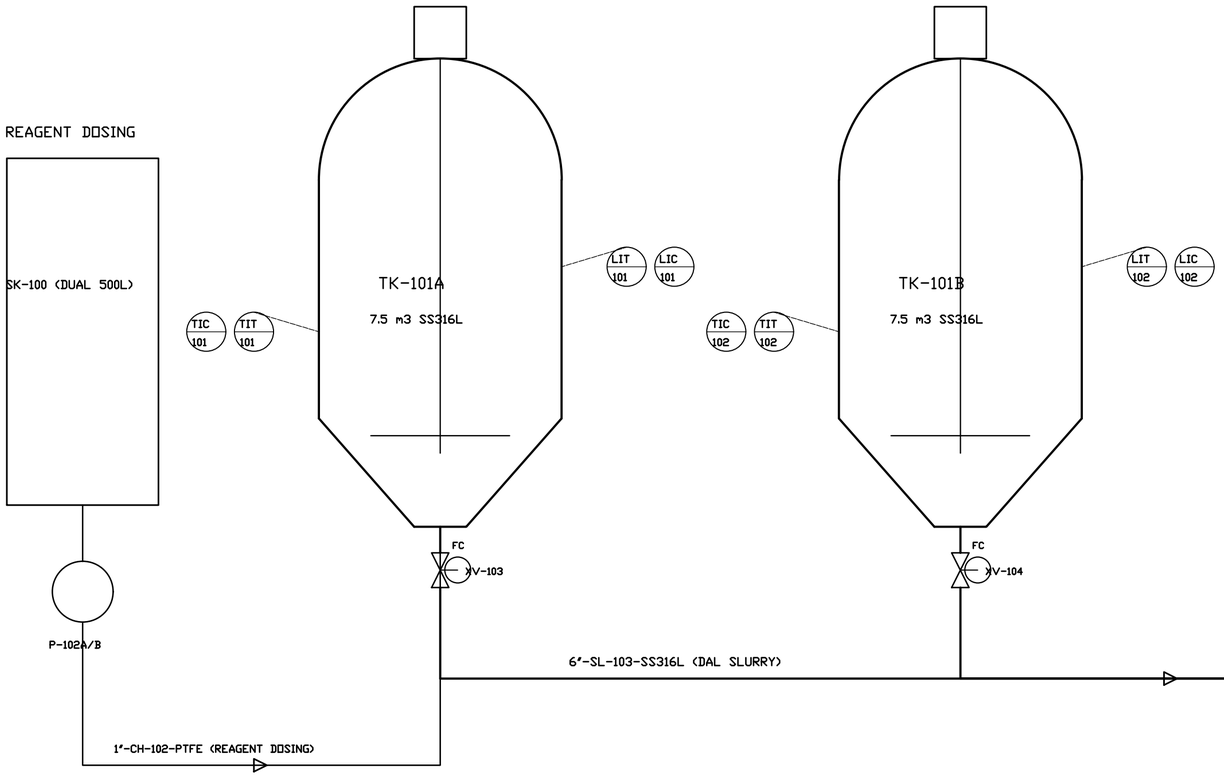


TAG NO	SERVICE	LINE / VESSEL	TRANSMITTER	CONTROLLER	FINAL CONTROL ELEMENT	INTERLOCK LOGIC & CONTROL NARRATIVE
LIC-101A	Soak Tank A Level	TK-101A	Diff Pressure LT-101A	PLC PID Loop	Pneumatic XV-101A	Auto cut-off water inlet at 85% batch level; LAH interlock alarm.
TIC-101A	Soak Tank A Temp	TK-101A	Duplex RTD TT-101A	PLC PID Loop	Modulating TCV-101A	Maintains 30.0 deg C +/- 1 deg C via steam injection coil; TAH trip.
AIC-101	Chemical Dosing pH	Dosing Line	Online pH AT-101	PLC Ratio Controller	VFD Metering Pump P-102	Paces reagent stroke volume proportional to batch water filling rate.
ZIC-103	Bottom Dump Knife	TK-101A Drain	Limit Switches ZT-103	PLC Sequence State	Air Piston Actuator XV-103	Interlocked with Dewatering Screen SC-101 run signal; prevents flood.
PIC-101	Vessel Dome Relief	TK-101A Vent	Press Trans PIT-101	Direct Acting PSV	Spring Loaded PSV-101	Protects vessel against overpressure / vacuum collapse during dump.

FINNOAQ AGRO-INDUSTRIAL TECHNOLOGIES LTD.
15,000 kg/day Split Pigeon Pea Optimization Greenfield Project

P&ID - RAPID HYDRATION SOAK BATTERY & DOSING SKID
DISCIPLINE: PIPING | LEAD: SOURISH SENAPATI | GUIDANCE: DR. ARCHISMAN RAY (IIT KGP)

DWG NO: DWG-FIN-15T-003	REV: V8.0	SHEET: 3 OF 12
SCALE: AS SHOWN DATE: 2026-10-17	STATUS: PRELIMINARY	GATE: G-A HOLD

CONCEPTUAL FEED - PRELIMINARY - NOT FOR CONSTRUCTION / NOT FOR PROCUREMENT | COPYRIGHT FINNOAQ

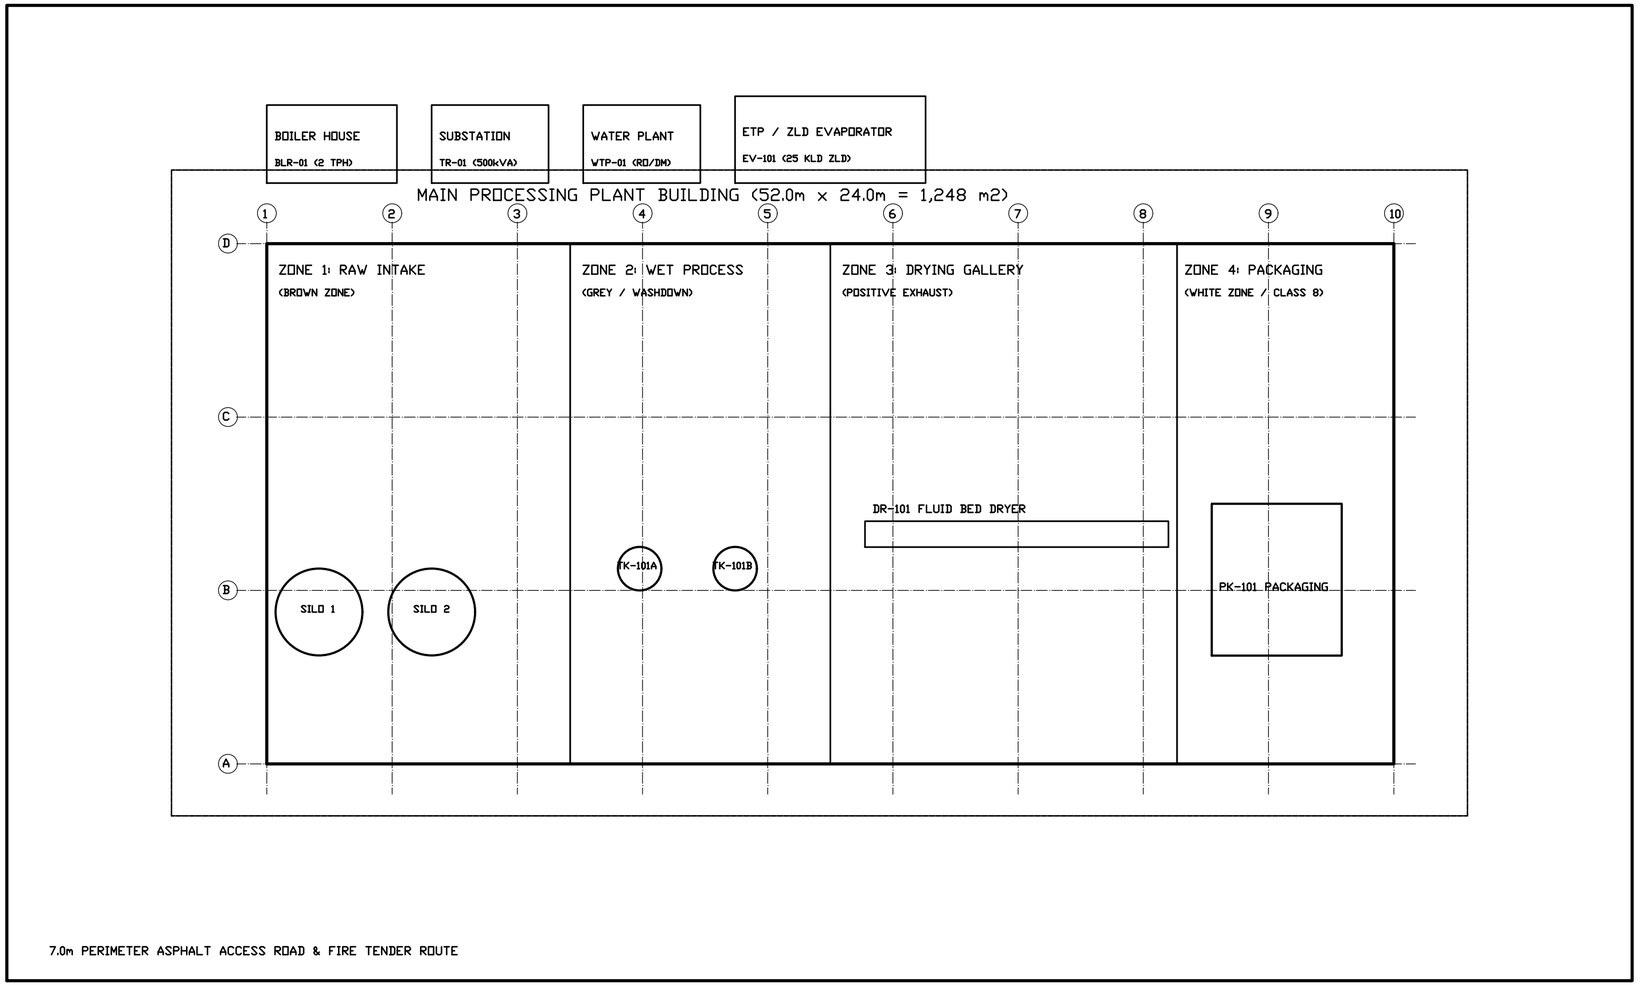

N

SITE AREA ALLOCATION & MASTER METRICS:

1. Total Greenfield Plot: 3,375.0 m2 (75.0m x 45.0m).
2. Main Processing Building: 1,248.0 m2 (52.0m x 24.0m).
3. Building Ground Coverage: 36.98% (Permissible: 50.0%).
4. Floor Area Ratio (FAR): 0.42 (Permissible: 1.50).
5. External Utility Yard: 380.0 m2 (Boiler, Substation, ETP).
6. Asphalt Roads & Parking: 1,215.0 m2 (Heavy vehicle turning).
7. Green Belt & Landscaping: 532.0 m2 (15.76% plot area).
8. Finished Floor Elevation: +600 mm above finished site grade.
9. Clear Eaves Height: 8.50 m (Apex Height: 10.20 m PEB structure).
10. Structural Bays: 9 bays @ 5.78m longitudinal, 3 @ 8.0m transverse.

HYGIENIC ZONING & HVAC PRESSURIZATION SCHEDULE:

ZONE 1 (BROWN ZONE) - RAW INTAKE & STORAGE:

* Area: 336.0 m2 | Pressurization: Neutral (0 Pa) | 6 ACH Exhaust.
* Surface: Anti-abrasion floor, dust extraction hoods on chutes.

ZONE 2 (GREY ZONE) - RAPID HYDRATION & CHEMICAL TREATMENT:

* Area: 288.0 m2 | Pressurization: Neutral to -5 Pa | 10 ACH.
* Surface: Polyurethane screed floor (R11 slip), stainless drains.
* Washdown: 100% wet cleaning compatible, coved wall joints.

ZONE 3 (GREY / DRY ZONE) - THERMAL FLUID BED DRYING GALLERY:

* Area: 384.0 m2 | Pressurization: +5 Pa (Prevent raw dust ingress).
* Air Handling: Filtered dry make-up air, acoustic enclosures.

ZONE 4 (WHITE ZONE) - SECONDARY PACKAGING & FINISHED GOODS:

* Area: 240.0 m2 | Cleanliness: ISO 14644-1 Class 8 Cleanroom.
* Pressurization: +15 Pa Positive Differential (Overpressure).
* Air Filtration: Central AHU with 99.99% HEPA H14 terminal units.
* Personnel Entry: Dual-door interlocked airlock with sticky mats.

LIFE SAFETY, EGRESS & EXPLOSION COMPLIANCE:


* NFPA 68 burst panel discharge ducts through roof (DR-101).
* 4x Fire egress doors with panic hardware leading to ring road.

FINNOAQ AGRO-INDUSTRIAL TECHNOLOGIES LTD.
15,000 kg/day Split Pigeon Pea Optimization Greenfield Project

SITE MASTER PLOT PLAN & HYGIENIC ZONING
DISCIPLINE: CIVIL/LAYOUT | LEAD: SOURISH SENAPATI | GUIDANCE: DR. ARCHISMAN RAY (IIT KGP)

DWG NO: DWG-FIN-15T-004	REV: V8.0	SHEET: 4 OF 12
SCALE: AS SHOWN DATE: 2026-10-17	STATUS: PRELIMINARY	GATE: G-A HOLD

CONCEPTUAL FEED - PRELIMINARY - NOT FOR CONSTRUCTION / NOT FOR PROCUREMENT | COPYRIGHT FINNOAQ

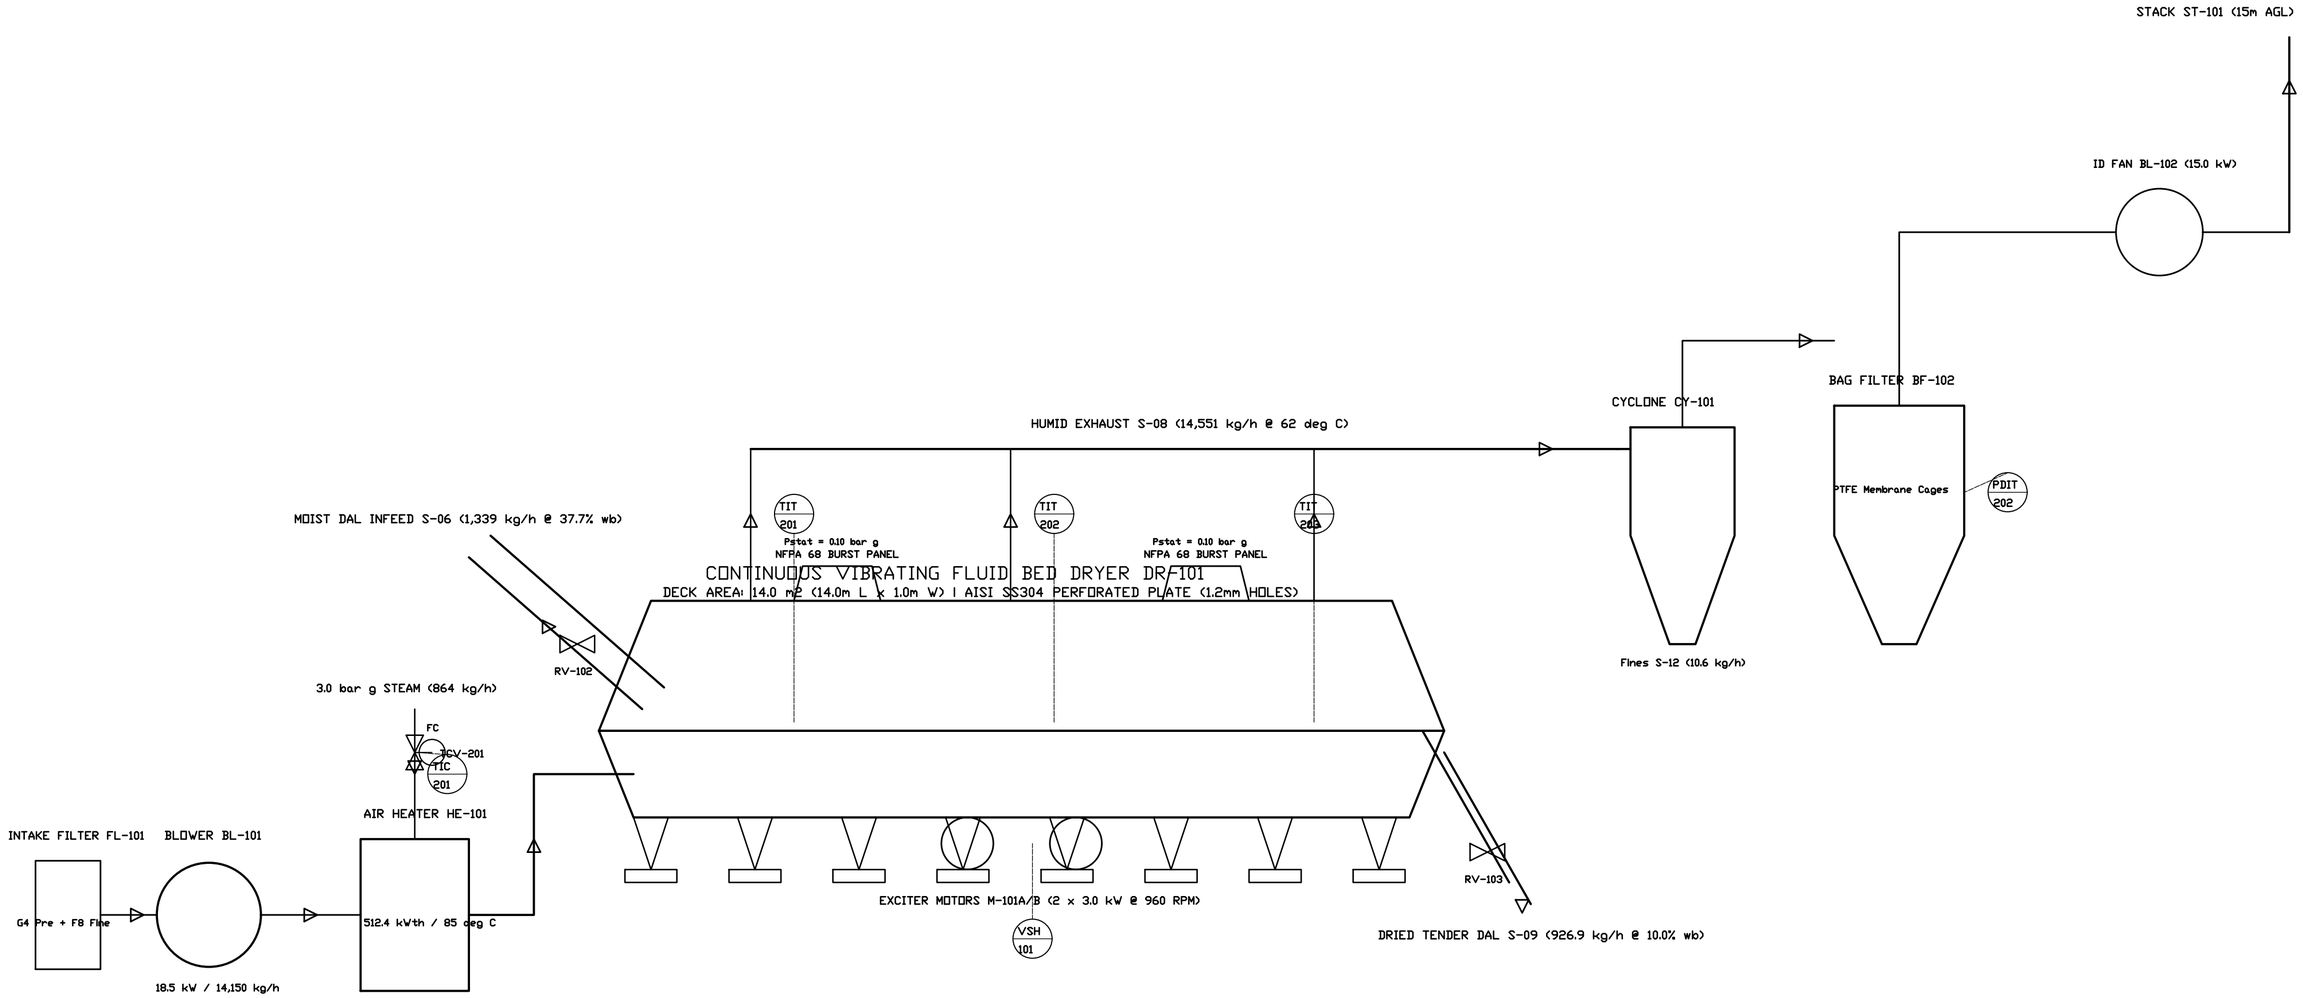

DRYER CONTROL PHILOSOPHY & SAFETY INTERLOCK MATRIX (ISA-84 / SIL-1):

1. TIC-201: Modulates 3" steam control valve TCV-201 to maintain fluidizing air at 85.0 deg C +/- 1.0 deg C.

2. I-02 Interlock: Low airflow (FIT-201 < 10,000 kg/h) or Blower BL-101 trip immediately failsafe-closes TCV-201.

3. I-03 Interlock: High-High bed temperature (TIT-202 > 95 deg C) trips infeed rotary valve RV-102 and alarms operator.

4. PDIT-202: Differential pressure across baghouse triggers sequential reverse pulse-jet cleaning @ 5.0 bar g air.

5. Vibration Interlock: High vibration switch VSH-101 trips exciter motors M-101A/B upon mechanical resonance.

6. Explosion Protection: Certified NFPA 68 burst panels vent deflagration safely upward to outdoor atmosphere.

EQUIPMENT SPECIFICATIONS & DESIGN PARAMETERS (DR-101 TRAIN):

DR-101: 14.0m L x 1.0m W x 2.8m H | Deck Area: 14.0 m2 | MOC: AISI SS304 contact, MS frame | 6,850 kg.

HE-101: 512.4 kWth finned-tube steam battery | Steam: 864 kg/h @ 3.0 bar g | Area: 42.0 m2 | 1,200 kg.

BL-101: Centrifugal backward-curved fan | 14,150 kg/h (11,800 m3/h) @ 2,800 Pa SP | 18.5 kW TEFC IP55.

CY-101: High-efficiency cyclone separator | 4.0m H x 1.2m Dia | Fines cut size d50 = 8 um | 850 kg.

BF-102: Pulse-jet baghouse | 64 PTFE needle-felt bags | Air-to-Cloth: 1.1 m/min | Residual dust < 5 mg/Nm3.


BL-102: Induced draft exhaust fan | 14,550 kg/h @ 2,200 Pa SP | 15.0 kW TEFC IP55 motor.

FINNOAQ AGRO-INDUSTRIAL TECHNOLOGIES LTD.
15,000 kg/day Split Pigeon Pea Optimization Greenfield Project

P&ID - FLUID BED DRYER & AIR SYSTEM
DISCIPLINE: PIPING | LEAD: SOURISH SENAPATI | GUIDANCE: DR. ARCHISMAN RAY (IIT KGP)

DWG NO: DWG-FIN-15T-005	REV: V8.0	SHEET: 5 OF 13
SCALE: AS SHOWN DATE: 2026-10-17	STATUS: PRELIMINARY	GATE: G-A HOLD

CONCEPTUAL FEED - PRELIMINARY - NOT FOR CONSTRUCTION / NOT FOR PROCUREMENT | COPYRIGHT FINNOAQ

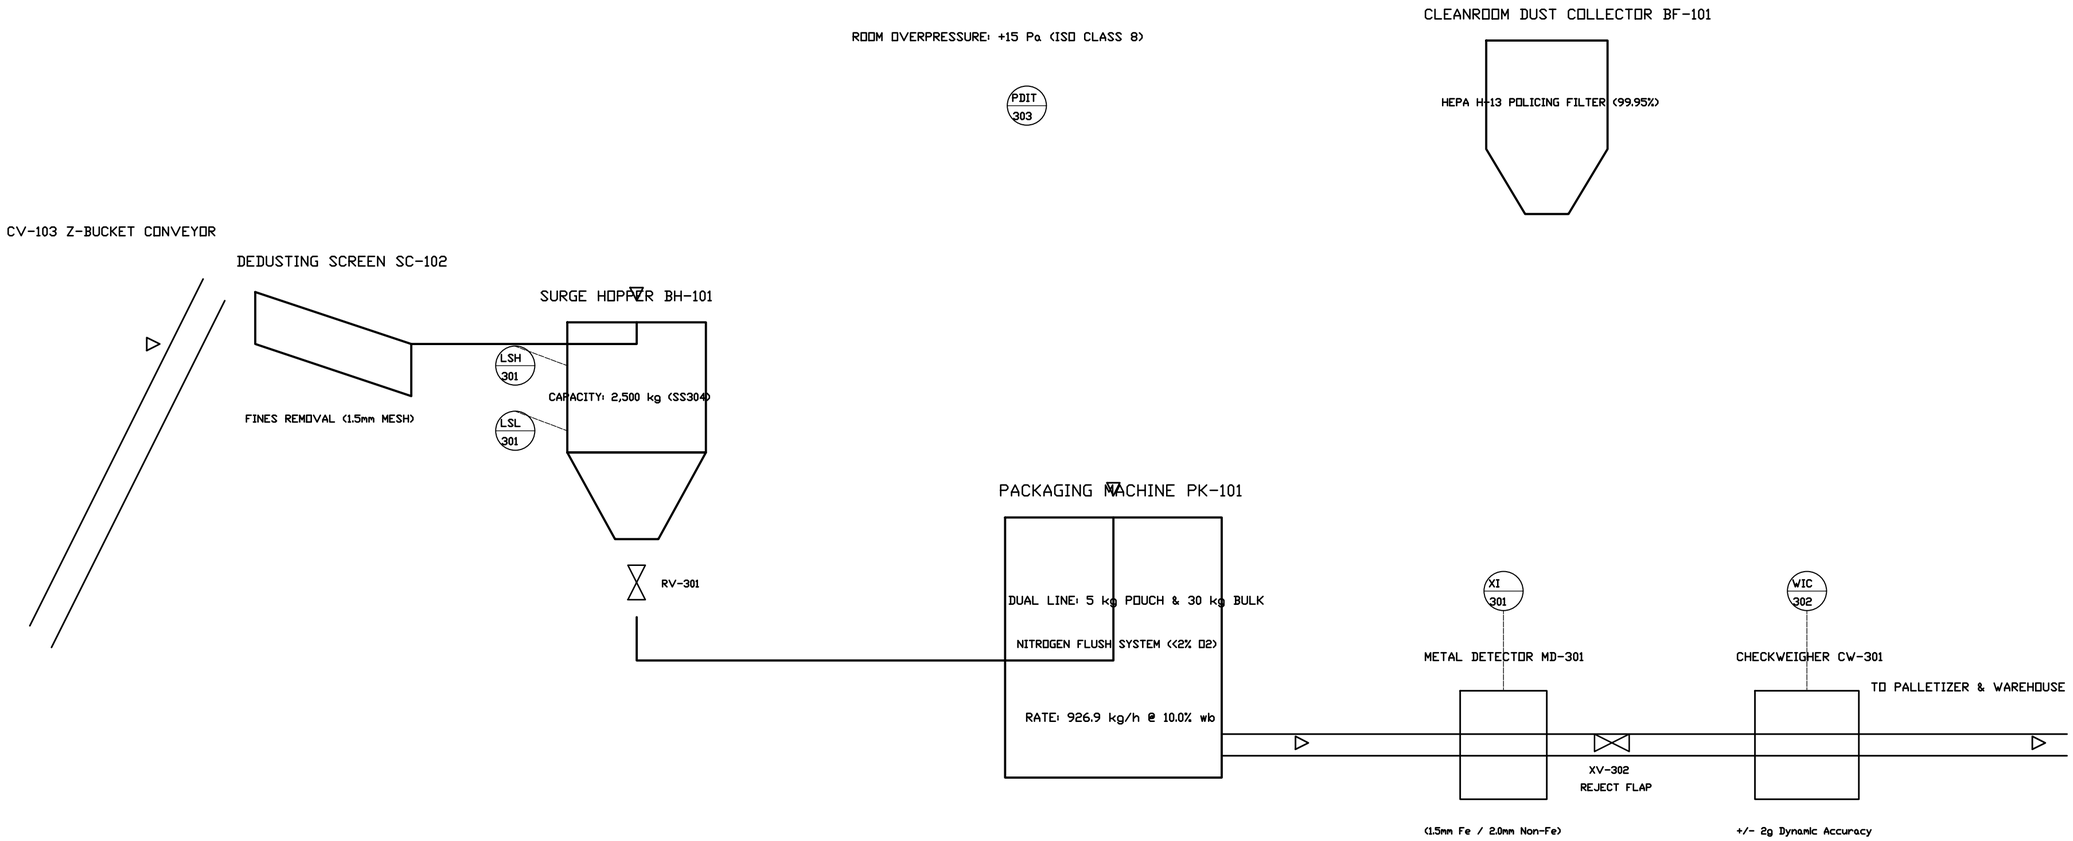

PACKAGING HACCP CRITICAL CONTROL POINTS (CCP-1 & CCP-2):

1. CCP-1 (Metal Detection): MD-301 audited every 2h with certified test wands (1.5mm Fe, 2.0mm Non-Fe, 2.5mm SS).

2. Any metal trip immediately triggers pneumatic reject flap XV-302 and halts infeed conveyor CV-103.

3. CCP-2 (Moisture Verification): Final packaged product moisture locked @ 10.0% +/- 0.5% wet-basis.

4. Nitrogen Gas Flush: Residual headspace oxygen < 2.0% to guarantee 12-month shelf life without lipid oxidation.

5. ISO Class 8 Cleanroom: Differential pressure > +15 Pa maintained against raw warehouse to prevent cross-contamination.

PACKAGING EQUIPMENT SPECIFICATIONS & LINE RATINGS:

PK-101A (Retail Line): Vertical Form-Fill-Seal (VFFS) machine | 5.0 kg standup laminate pouches @ 25 bpm.

PK-101B (Bulk Line): Automatic open-mouth bagging machine | 30.0 kg HDPE-lined woven sacks @ 6 bpm.

MD-301: Aperture 450mm x 150mm | Multi-frequency digital signal processing | IP66 washdown SS304.

CW-301: Dynamic strain-gauge load cell | Belt speed 35 m/min | Auto tare & zero tracking | Reject: Air blast.

BF-101: 2,500 m3/h dedicated cleanroom exhaust filter | 24 antistatic cartridges + H-13 HEPA module | 3.0 kW.

FINNOAQ AGRO-INDUSTRIAL TECHNOLOGIES LTD.


15,000 kg/day Split Pigeon Pea Optimization Greenfield Project

P&ID - PACKAGING LINE & CLEANROOM DEDUSTING


DISCIPLINE: PIPING | LEAD: SOURISH SENAPATI | GUIDANCE: DR. ARCHISMAN RAY (IIT KGP)

DWG NO: DWG-FIN-15T-006	REV: V8.0	SHEET: 6 OF 13
SCALE: AS SHOWN DATE: 2026-10-17	STATUS: PRELIMINARY	GATE: G-A HOLD

CONCEPTUAL FEED - PRELIMINARY - NOT FOR CONSTRUCTION / NOT FOR PROCUREMENT | COPYRIGHT FINNOAQ

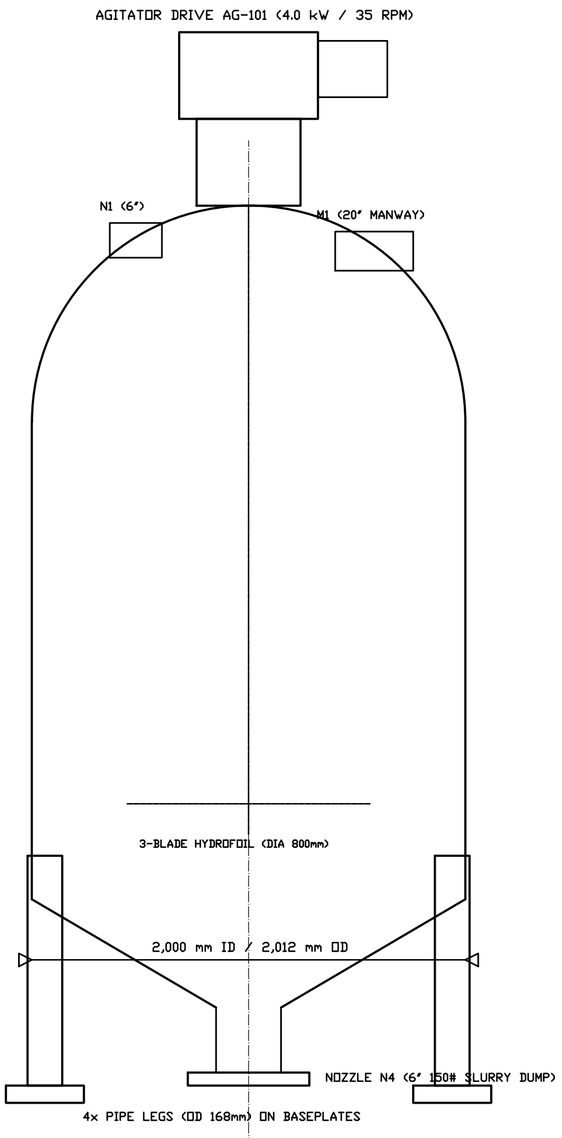

FRONT ELEVATION VIEW (SCALE 1:20)

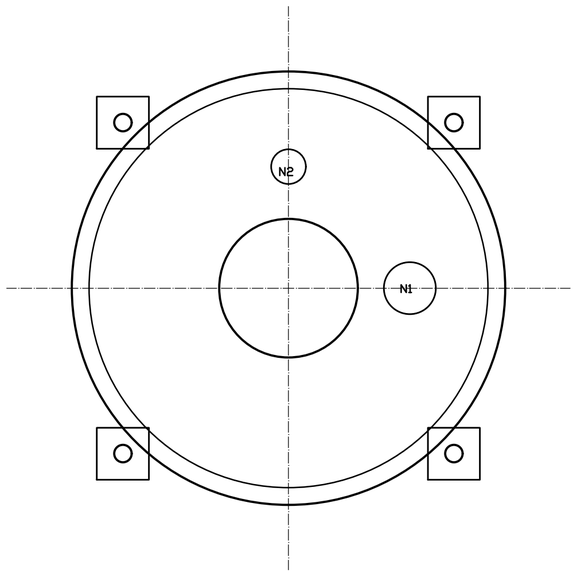

TOP PLAN VIEW (SCALE 1:20)

MARK	SIZE	RATING	FACING	SERVICE / DESCRIPTION
N1	6" NB	150# ANSI	RF WNRF	Raw Dal Grain Infeed Chute
N2	2" NB	150# ANSI	RF WNRF	Process Soft Water Inflow
N3	1" NB	150# ANSI	RF WNRF	Chemical Reagent Dosing Inflow
N4	6" NB	150# ANSI	RF WNRF	Soaked Dal Slurry Dump to Screen
N5	2" NB	150# ANSI	RF WNRF	CIP Spray Ball Supply Header
N6	3" NB	150# ANSI	RF WNRF	Atmospheric Vent / Pressure Relief
M1	20" NB	150# ANSI	RF Davit	Inspection & Maintenance Manway

MECHANICAL DESIGN DATA & FABRICATION SPECIFICATION:

1. DESIGN CODE: ASME Boiler & Pressure Vessel Code Sec VIII Div 1 (Reference).

2. WORKING CAPACITY: 7.50 m3 | GROSS INTERNAL VOLUME: 8.45 m3.

3. DESIGN PRESSURE: Full Atmospheric (FV / 0.50 bar g Hydrostatic Liquid Head).

4. DESIGN TEMPERATURE: 65.0 deg C | OPERATING TEMPERATURE: 30.0 deg C +/- 1 deg C.

5. SHELL METALLURGY: AISI SS316L (6.0 mm nominal thk, 2B sanitary finish).

6. HEAD METALLURGY: AISI SS316L (8.0 mm thk, 2:1 Ellipsoidal seamless formed).

7. CONICAL HOPPER: AISI SS316L (6.0 mm thk, 60 deg included angle with smooth knuckle).

8. INTERNAL SURFACE FINISH: Ra <= 0.8 um (180 Grit electro-polished, weld ground flush).

9. EXTERNAL FINISH: Descaled, passivated and Scotch-Brite uniform satin finish.

10. RADIOGRAPHY & NDT: Spot Radiography per ASME UW-52 (Joint Efficiency E = 0.85).

11. HYDROSTATIC TEST: Shop Hydro-tested at 1.30 x Design = 0.65 bar g for 60 min.

12. AGITATOR: SEW-Eurodrive Helical-bevel geared motor, 4.0 kW, 35 RPM output.

13. IMPELLER: 3-Blade high-efficiency hydrofoil (Dia 800 mm, AISI SS316L solid cast).

14. CIP SYSTEM: 2x 360 deg Rotary spray balls (SS316L) covering 100% internal surface.

15. VESSEL WEIGHTS: Tare Empty Weight: 1,850 kg | Full Water-Filled Weight: 9,350 kg.

16. FOUNDATION LOADS: 4x Support legs, vertical load 23.4 kN/leg, anchor bolts 4x M20 SS304.


17. CERTIFICATION: Manufacturer's Data Report Form U-1 / EN 10204 3.1 Mill Test Certificates.

FINNOAQ AGRO-INDUSTRIAL TECHNOLOGIES LTD.
15,000 kg/day Split Pigeon Pea Optimization Greenfield Project

EQUIPMENT GENERAL ARRANGEMENT - SOAK VESSEL TK-101
DISCIPLINE: MECHANICAL | LEAD: SOURISH SENAPATI | GUIDANCE: DR. ARCHISMAN RAY (IIT KGP)

DWG NO: DWG-FIN-15T-007	REV: V8.0	SHEET: 7 OF 12
SCALE: AS SHOWN DATE: 2026-10-17	STATUS: PRELIMINARY	GATE: G-A HOLD

CONCEPTUAL FEED - PRELIMINARY - NOT FOR CONSTRUCTION / NOT FOR PROCUREMENT | COPYRIGHT FINNOAQ

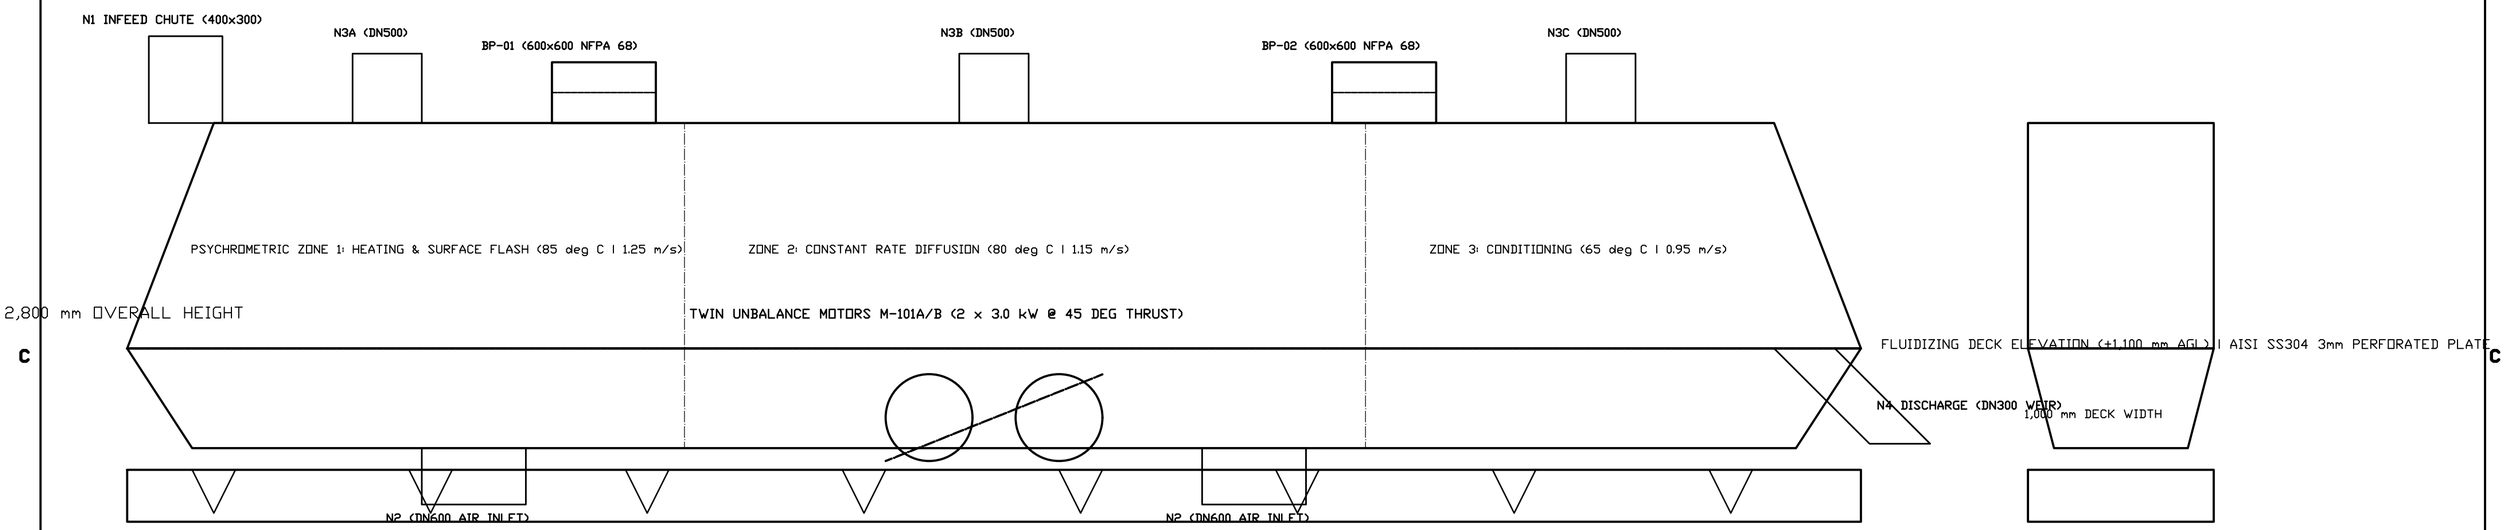

MARK	SERVICE	SIZE	RATING	FACING	LOCATION
N1	Moist Dal Infeed	400x300	FLANGED	FLAT FACE	Top Hood Infeed End
N2A/B	Hot Air Supply	2x DN600	150#	RAISED FACE	Bottom Plenum Underside
N3A-C	Exhaust Air Outlets	3x DN500	150#	FLAT FACE	Top Hood Crown
N4	Dry Dal Discharge	DN300	150#	RAISED FACE	Discharge End Retention Weir
N5	Plenum Fines Drain	DN100	150#	RAISED FACE	Plenum Invert Low Point
M1-M4	Inspection Doors	4x 500x400	HINGED	FOOD GASKET	Drive & Non-Drive Sides
BP-01/02	NFPA 68 Burst Panels	2x 600x600	SS COMPOSITE	ROOF DUCTED	Expansion Hood Crown

MECHANICAL, VIBRATION DYNAMICS & NFPA 68 SAFETY SPECIFICATION:


1. Equipment Tag: DR-101 | Service: Continuous Vibrating Fluid Bed Dal Conditioning & Drying.
2. Effective Deck Dimensions: 14,000 mm Length x 1,000 mm Width (Effective Area: 14.0 m2).
3. Material of Construction: All product contact parts SS304 (Ra < 0.8 um sanitary polish). Non-contact IS2062 CS.
4. Fluidizing Air Rate: 14,150 kg/h (11,800 m3/h @ 85 deg C) | Superficial Velocity: 1.15 m/s (Umf = 0.85 m/s).
5. Water Evaporation Duty: 412.34 kg/h H2O | Thermal Heating Duty: 512.4 kWth via Steam Coil HE-101.
6. Vibration Dynamics: Stroke amplitude 3.5 mm @ 16 Hz (960 RPM); Twin unbalance motors 2 x 3.0 kW @ 45 deg.
7. Isolation Efficiency: 8x Heavy-duty helical coil springs with rubber snubbers (>96% dynamic isolation).
8. Residence Time: 18.0 - 22.0 minutes plug-flow with adjustable discharge overflow retention weir.
9. NFPA 68 EXPLOSION RELIEF: Dual 600x600 mm composite rupture panels (Pred = 0.2 bar g, Pstat = 0.1 bar g).
   - Sized for St-1 Agricultural Pulse Dust (Kst = 85 bar-m/s, Pmax = 7.8 bar g) with ducted vent to building exterior.
10. Safety Hold: Final dynamic balancing, spring resonance validation and FAT testing required prior to site release.

FINNOAQ AGRO-INDUSTRIAL TECHNOLOGIES LTD.
15,000 kg/day Split Pigeon Pea Optimization Greenfield Project

EQUIPMENT GENERAL ARRANGEMENT - FLUID BED DRYER DR-101
DISCIPLINE: MECHANICAL | LEAD: SOURISH SENAPATI | GUIDANCE: DR. ARCHISMAN RAY (IIT KGP)

DWG NO: DWG-FIN-15T-008	REV: V8.0	SHEET: 8 OF 12
SCALE: AS SHOWN DATE: 2026-10-17	STATUS: PRELIMINARY	GATE: G-A HOLD

CONCEPTUAL FEED - PRELIMINARY - NOT FOR CONSTRUCTION / NOT FOR PROCUREMENT | COPYRIGHT FINNOAQ

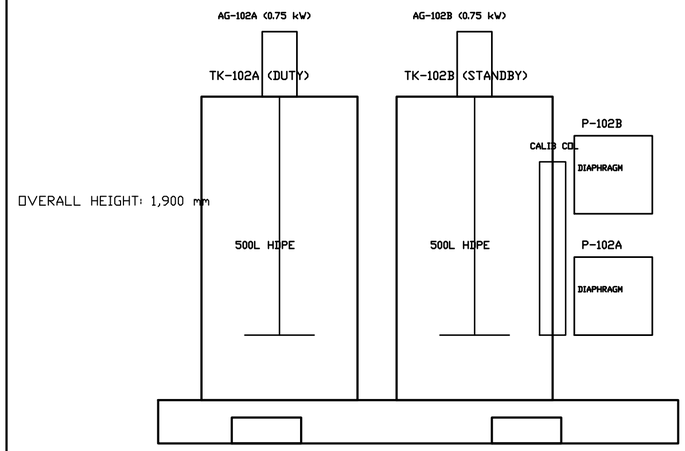

CHEMICAL REAGENT DOSING SKID SPECIFICATION & BILL OF MATERIALS (SK-100):

ITEM 01: Solution Preparation Tanks TK-102A/B (2 Units, Duty / Standby)

- Net Working Volume: 500 Liters each | Material: UV-Stabilized Food-Grade Cross-Linked HDPE (FDA 21 CFR 177.1520).
- Tank Geometry: 800 mm Dia x 1,100 mm Straight Shell Height | Conical bottom with 1.5" drain valve.
- Accessories: Hinged powder loading hatch with safety interlock, dust screen, ultrasonic level transmitter LT-102.

ITEM 02: High-Shear Agitator Mixers AG-102A/B (2 Units)

- Motor: 0.75 kW, 415V, 3-Phase, 50 Hz, IP55, TEFC | Shaft & Impeller: AISI SS316L 4-Blade Marine Propeller.
- Process Service: Rapid dissolution of food-grade Sodium Bicarbonate / Trisodium Citrate salts @ 25-35 deg C.

ITEM 03: Precision Metering Chemical Pumps P-102A/B (2 Units, Duty / Standby)

- Pump Type: Positive Displacement Mechanically Actuated PTFE Diaphragm Dosing Pumps.
- Flow Capacity: 5.0 to 50.0 L/h (Normal Operating Point: 14.06 L/h for 1.0 wt% reagent liquor recipe).
- Turndown: 10:1 Turndown ratio with micrometer stroke length adjuster + 4-20mA VFD speed modulation.
- Wetted Metallurgy: PVDF Liquid End, Ceramic Double Ball Check Valves, Pure Virgin PTFE Diaphragm.

ITEM 04: Skid Piping, Instrumentation & Safety Systems

- Process Piping: 1" NB Schedule 10S AISI SS316L piping with sanitary tri-clamp fittings.
- Pressure Relief Valves PSV-102A/B: Set @ 4.0 bar g with full recirculation bypass to suction tank.
- Pulsation Dampener: Bladder-type 0.5L PVDF dampener smoothing discharge pulsation to < +/-2.5%.
- Calibration Column: 1,000 mL Borosilicate glass cylinder with 3-way isolation valve for flow rate verification.
- Bund Containment: 110% Spill containment capacity (600L) with optical liquid leakage switch LS-102 interlocked to ESD.

SKID NOZZLE SCHEDULE & UTILITY INTERFACE SCHEDULE:


NOZZLE	SERVICE	SIZE	RATING	FACING	METALLURGY	CONNECTED TO
N1	Soft Water Supply Infeed	1.5" NB	ANSI 150#	Flat Face	AISI SS316L	WTP-01 Header @ 2.5 bar g
N2	Chemical Dosing Discharge	1.0" NB	ANSI 150#	Raised Face	AISI SS316L	Soak Battery TK-101 Feed Spool
N3	Containment Bund Drain	2.0" NB	ANSI 150#	Flat Face	AISI SS304	ETP Equalization Pit TK-104
E1	Main Electrical Power Feed	4-Core	415V / 50Hz	Glanded	Armoured Cu	MCC-01 Feeder Feat-04 (3.5 kW)
I1	Automation Signal Trunk	12-Pair	4-20mA / DI	Shielded	Tinned Cu	Remote I/O Panel RIO-02 (Modbus TCP)

FINNOAQ AGRO-INDUSTRIAL TECHNOLOGIES LTD.
15,000 kg/day Split Pigeon Pea Optimization Greenfield Project

EQUIPMENT GA - CHEMICAL DOSING SKID SK-100
DISCIPLINE: MECHANICAL | LEAD: SOURISH SENAPATI | GUIDANCE: DR. ARCHISMAN RAY (IIT KGP)

DWG NO: DWG-FIN-15T-009	REV: V8.0	SHEET: 9 OF 13
SCALE: AS SHOWN DATE: 2026-10-17	STATUS: PRELIMINARY	GATE: G-A HOLD

CONCEPTUAL FEED - PRELIMINARY - NOT FOR CONSTRUCTION / NOT FOR PROCUREMENT | COPYRIGHT FINNOAQ

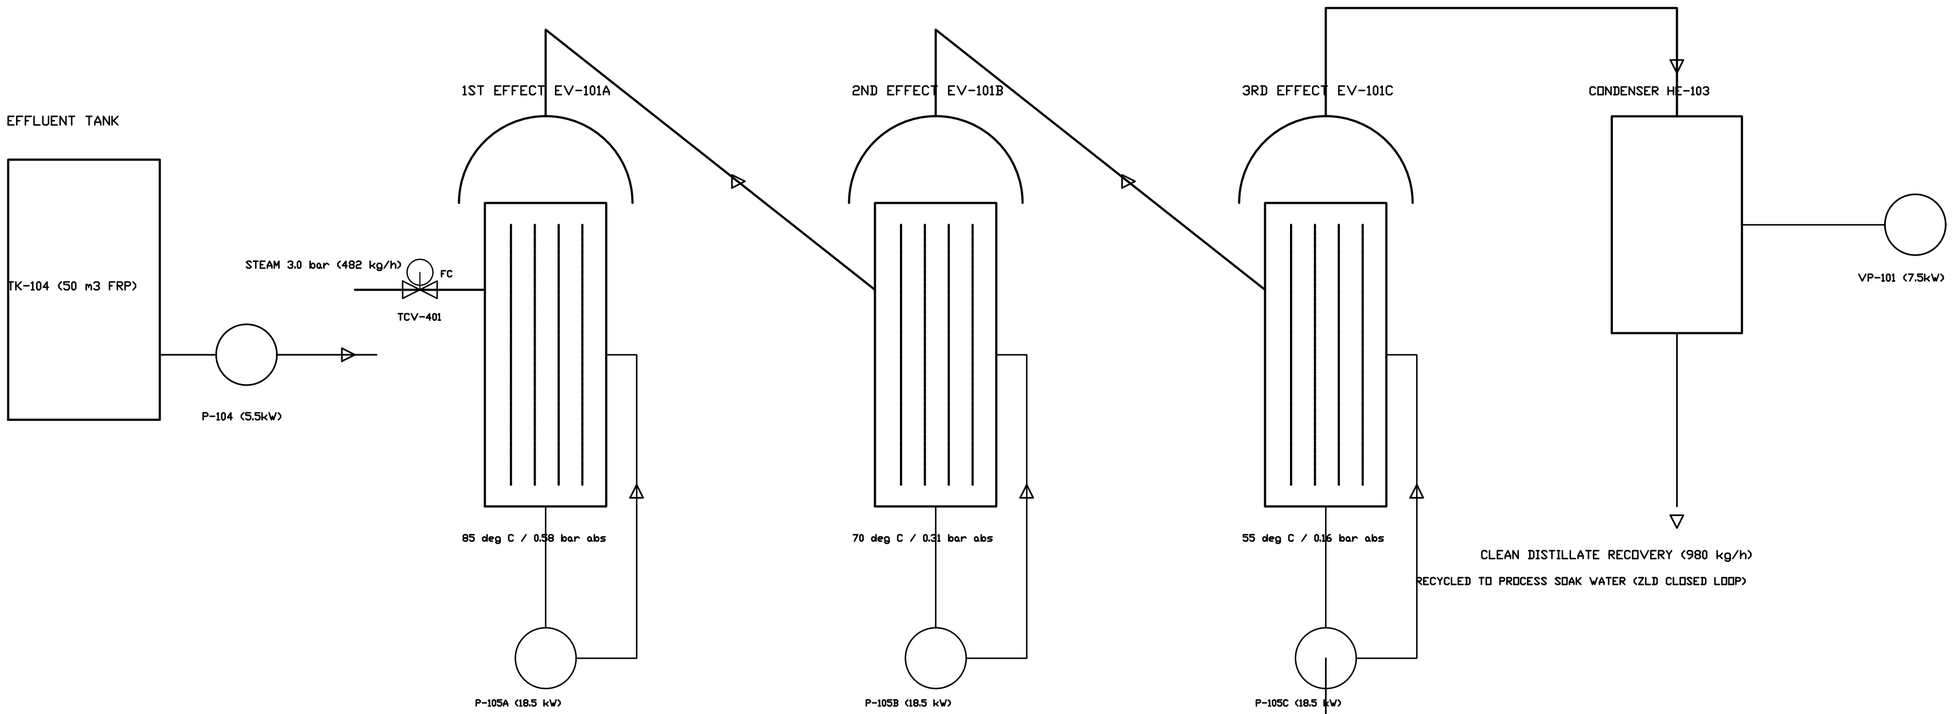

ZLD TRIPLE-EFFECT EVAPORATOR OPERATING SPECIFICATIONS & INSTRUMENTATION:


1. Feed Rate: 1,018.75 kg/h spent soak liquor @ 0.63 wt% dissolved organic/mineral solids.
2. Evaporation Capacity: 980.0 kg/h clean distillate recovery (96.2% volumetric water recovery rate).
3. Steam Economy: 2.38 kg H2O evaporated per kg 3.0 bar g motive steam supplied (0.42 kg steam / kg H2O).
4. Distillate Quality: Total Dissolved Solids (TDS) < 25 ppm, Conductivity < 40 uS/cm (Recycled directly to soak process).
5. Instrumentation: Full ISA-5.1 control loops (TIC-401 steam feed, LIC-401/402 inter-effect, DIC-403 density bleed).
6. Concentrate Discharge: 38.75 kg/h heavy slurry (40% total solids) to solar crystallization pan.

FINNOAQ AGRO-INDUSTRIAL TECHNOLOGIES LTD.
15,000 kg/day Split Pigeon Pea Optimization Greenfield Project


P&ID - TRIPLE-EFFECT ZLD WASTEWATER EVAPORATOR
DISCIPLINE: PIPING | LEAD: SOURISH SENAPATI | GUIDANCE: DR. ARCHISMAN RAY (IIT KGP)

DWG NO: DWG-FIN-15T-010	REV: V8.0	SHEET: 10 OF 12
SCALE: AS SHOWN DATE: 2026-10-17	STATUS: PRELIMINARY	GATE: G-A HOLD

CONCEPTUAL FEED - PRELIMINARY - NOT FOR CONSTRUCTION / NOT FOR PROCUREMENT | COPYRIGHT FINNOAQ

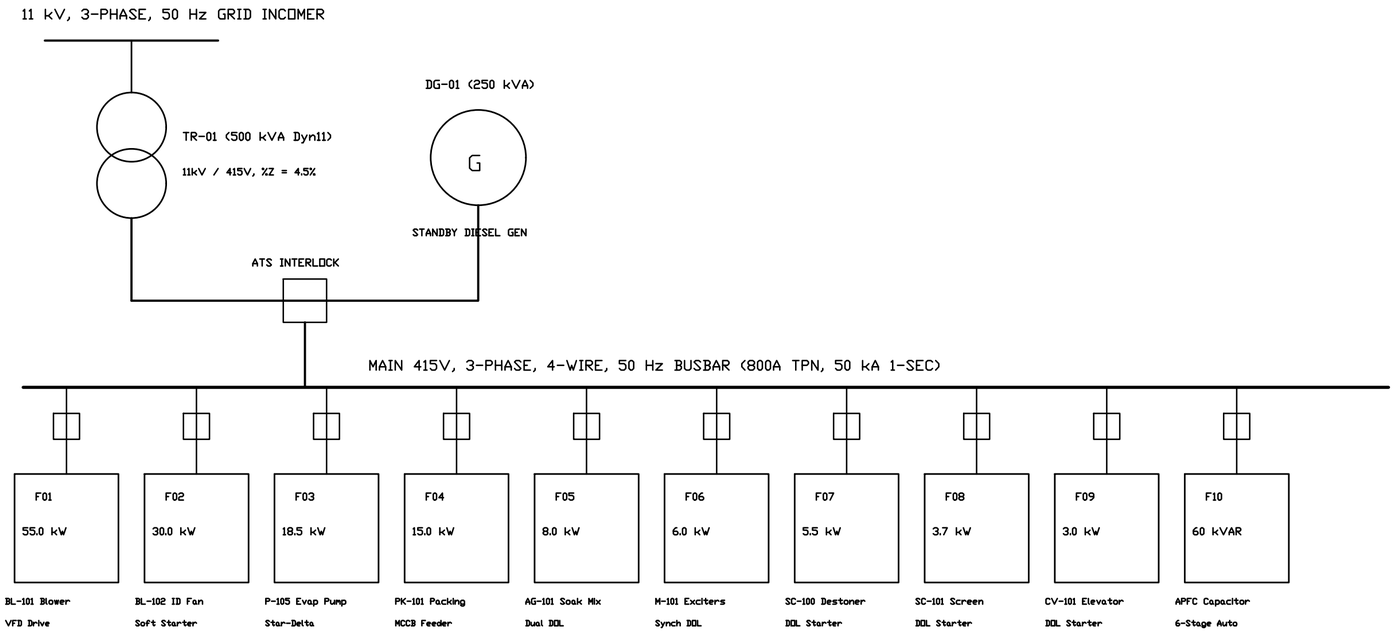

INDUSTRIAL SCADA & PLC AUTOMATION ARCHITECTURE (ISA-95 / IEC 62443):

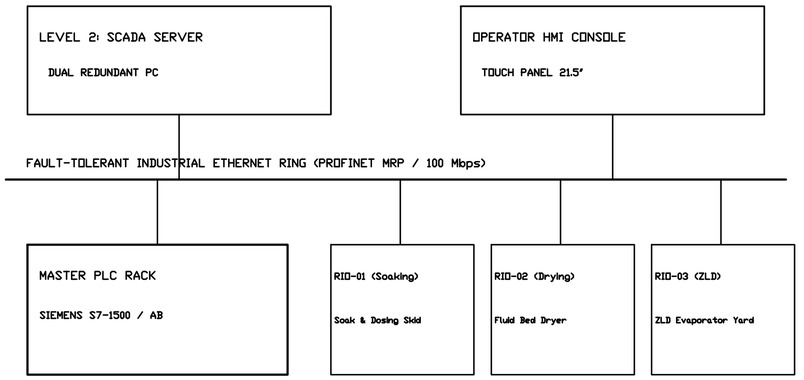

LEVEL 0 FIELD INTERFACE: HART 4-20mA Analog Loops, Modbus RS-485 Power Meters, VFDs on PROFINET

SAFETY INTEGRITY: Dual E-Stop Safety Relays (Cat 4 / SIL 3) hardwired to MCC Main Incomer Trips

ELECTRICAL LOAD SUMMARY, MOTOR FEEDER SIZING & SWITCHGEAR SCHEDULE:

1. TOTAL CONNECTED LOAD: 184.5 kW | DIVERSITY FACTOR: 0.70 | PEAK RUNNING DEMAND: 129.2 kW (131.8 kVA @ 0.98 PF).

2. POWER FACTOR CORRECTION: 60 kVAR Automatic APFC Bank maintains bus power factor at >= 0.98 lag (Penalty free).

3. TRANSFORMER SIZING: 500 kVA, 11kV/415V, Dyn11, ONAN cooling. Loading: 26.4% (Substantial headroom for Phase 2).

4. STANDBY GENERATION: 250 kVA (200 kW @ 0.8 PF) Diesel Generator with automatic mains failure (AMF) and ATS interlock.

5. UNINTERRUPTIBLE POWER SUPPLY (UPS): 10 kVA Online industrial true-sine UPS powering PLC, SCADA, and safety instruments.

6. SHORT CIRCUIT RATING: 50 kA for 1 second fault withstand rating on all MCC switchgear, busbars, and circuit breakers.

7. EARTHING & PROTECTION: Combined TN-S system with dedicated chemical copper earthing pits (<1.0 ohm resistance).

8. LIGHTNING PROTECTION: Early Streamer Emission (ESE) air terminal per IS/IEC 62305 with 45m protection radius.


FINNOAQ AGRO-INDUSTRIAL TECHNOLOGIES LTD.
15,000 kg/day Split Pigeon Pea Optimization Greenfield Project

ELECTRICAL SINGLE-LINE DIAGRAM & AUTOMATION SCADA TOPOLOGY
DISCIPLINE: ELECTRICAL | LEAD: SOURISH SENAPATI | GUIDANCE: DR. ARCHISMAN RAY (IIT KGP)

DWG NO: DWG-FIN-15T-011	REV: V8.0	SHEET: 11 OF 12
SCALE: AS SHOWN DATE: 2026-10-17	STATUS: PRELIMINARY	GATE: G-A HOLD

CONCEPTUAL FEED - PRELIMINARY - NOT FOR CONSTRUCTION / NOT FOR PROCUREMENT | COPYRIGHT FINNOAQ

PROCESSING BUILDING - PLAN VIEW COMBUSTIBLE DUST ZONING (NFPA 652 / IEC 60079-10-2)

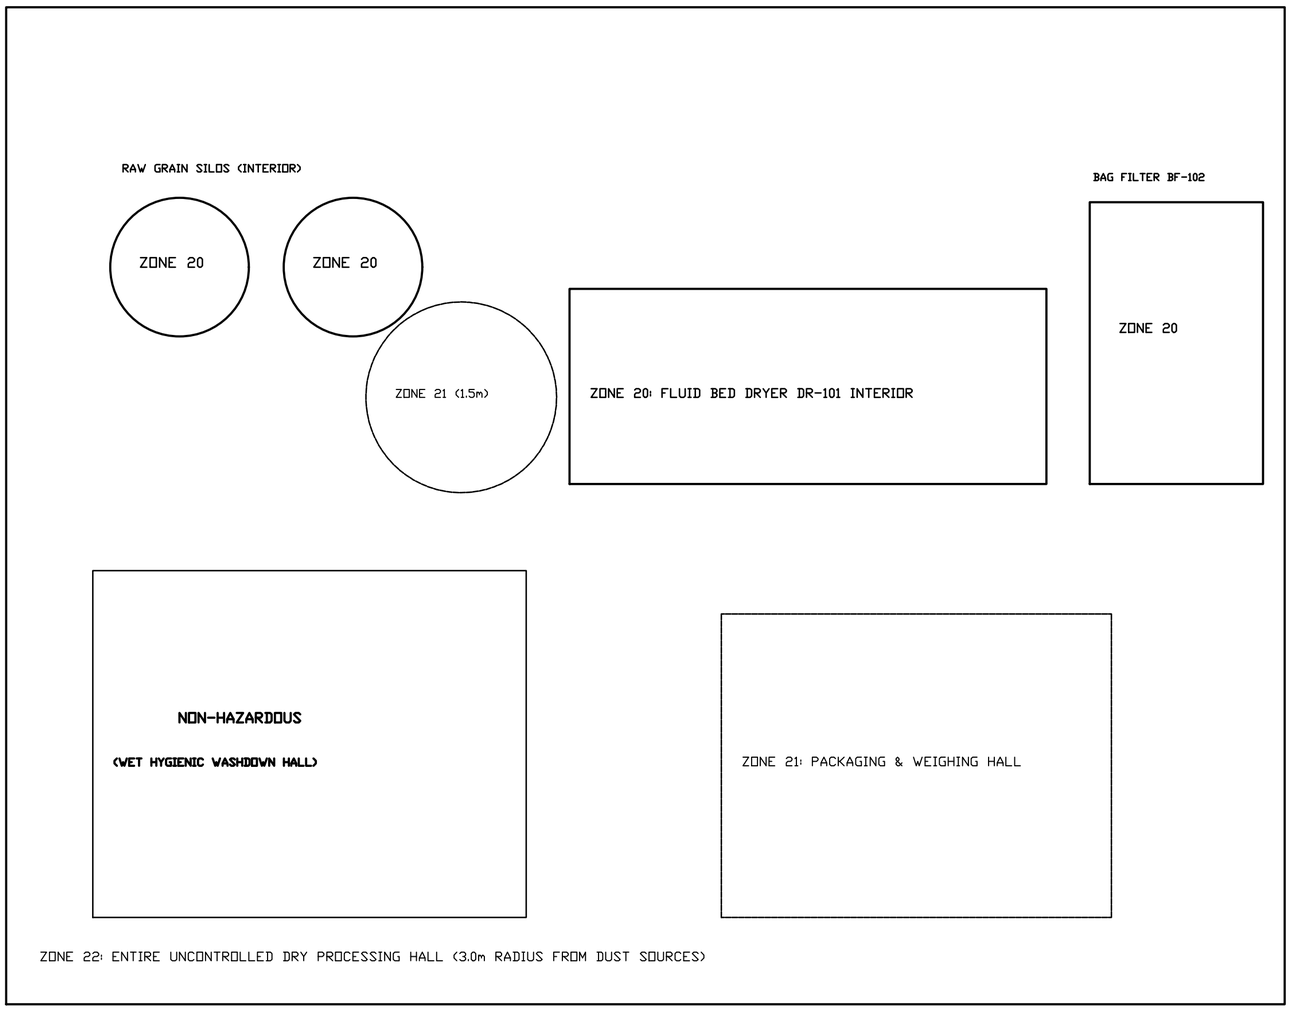

COMBUSTIBLE DUST CHARACTERISTICS (NFPA 652):

1. Material: Tanzanian Toor Dal Grain Dust (Cajanus cajan)

2. Dust Deflagration Class: St 1 (Kst: 85 bar-m/s, moderate)

3. Maximum Explosion Pressure Pmax: 7.6 bar g

4. Minimum Ignition Energy (MIE): > 30 mJ (No spark hazard)

5. Minimum Ignition Temp (MIT - Cloud): 430 deg C

6. Layer Ignition Temperature (LIT - 5mm): 260 deg C

7. Permissible Equipment Surface Temp: T120 deg C

   (Max 2/3 of MIT / 75K below LIT per IEC 60079-0)

8. Zone 20 Enclosures: IP65 Ex tb IIIC T120 deg C Da

9. Zone 21/22 Enclosures: IP55 Ex tc IIIC T120 deg C Dc

10. Explosion Relief: Dual certified NFPA 68 burst panels

    on DR-101 hood and flameless vents on BF-102.

11. Static Bonding: All pipes, ductwork, filter cages and

    vessels bonded to earthing grid (< 10 ohms resistance).

12. Housekeeping Standard: Scheduled vacuum cleaning

    preventing dust layer accumulation > 1.0 mm.

HAZARDOUS AREA ZONE CLASSIFICATION DEFINITIONS & APPLICABLE STANDARDS:

ZONE 20: A place in which an explosive atmosphere in the form of a cloud of combustible dust in air is present continuously, or for long periods or frequently (> 1,000 h/year). Equipment must be Category 1D / EPL Da certified.

ZONE 21: A place in which an explosive atmosphere in the form of a cloud of combustible dust in air is likely to occur in normal operation occasionally (10 to 1,000 h/year). Equipment must be Category 2D / EPL Db certified.

ZONE 22: A place in which an explosive atmosphere in the form of a cloud of combustible dust in air is not likely to occur in normal operation but, if it does occur, will persist for a short period only (< 10 h/year). Category 3D / EPL Dc.

REGULATORY COMPLIANCE: NFPA 652 (Standard on the Fundamentals of Combustible Dust), NFPA 68 (Standard on Explosion Protection by Deflagration Venting), IEC 60079-10-2 (Explosive Atmospheres - Dust Area Classification), OSHA 1910.307.

FINNOAQ AGRO-INDUSTRIAL TECHNOLOGIES LTD.


15,000 kg/day Split Pigeon Pea Optimization Greenfield Project


HAZARDOUS AREA CLASSIFICATION & DUST ZONING

DISCIPLINE: SAFETY | LEAD: SOURISH SENAPATI | GUIDANCE: DR. ARCHISMAN RAY (IIT KGP)

DWG NO: DWG-FIN-15T-012	REV: V8.0	SHEET: 12 OF 13
SCALE: AS SHOWN DATE: 2026-10-17	STATUS: PRELIMINARY	GATE: G-A HOLD

CONCEPTUAL FEED - PRELIMINARY - NOT FOR CONSTRUCTION / NOT FOR PROCUREMENT | COPYRIGHT FINNOAQ

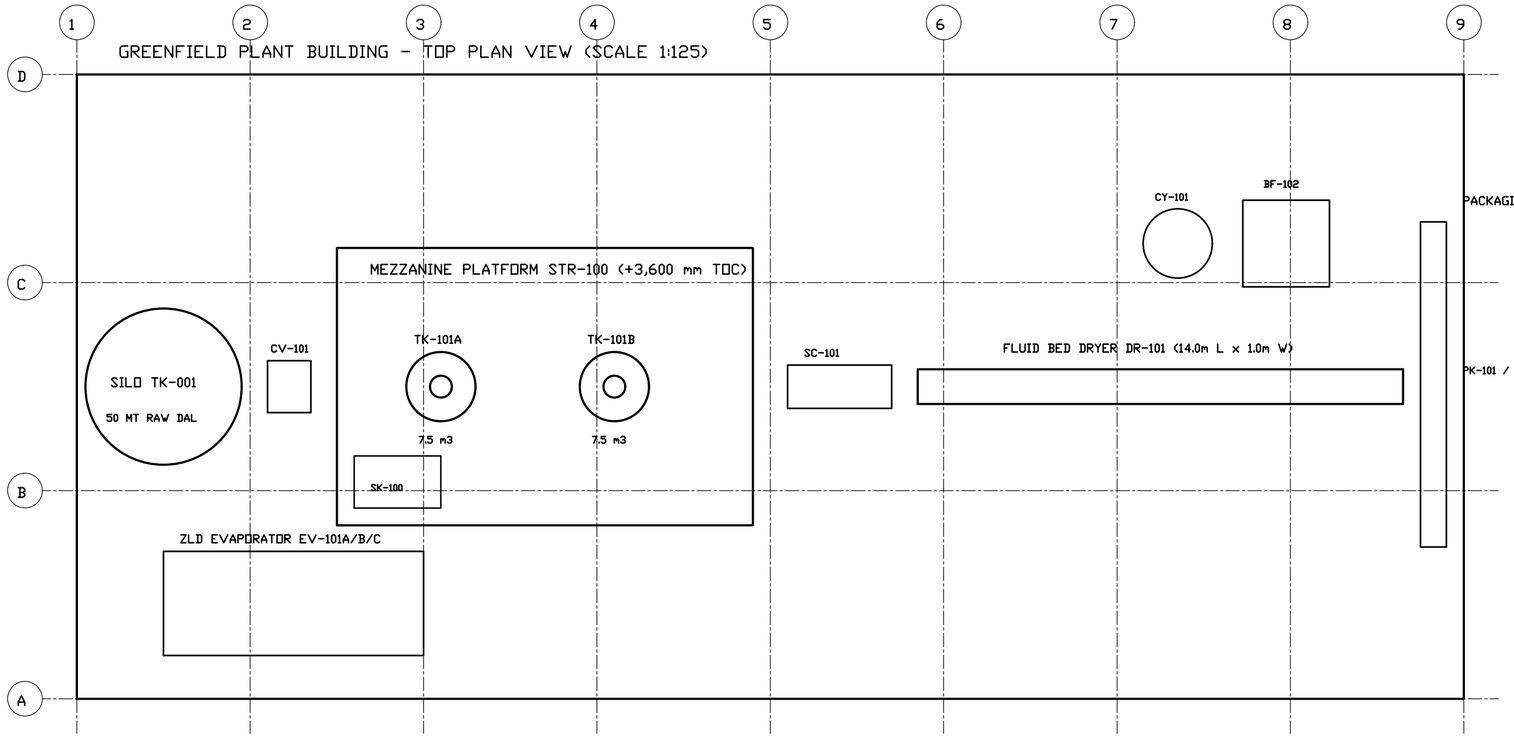

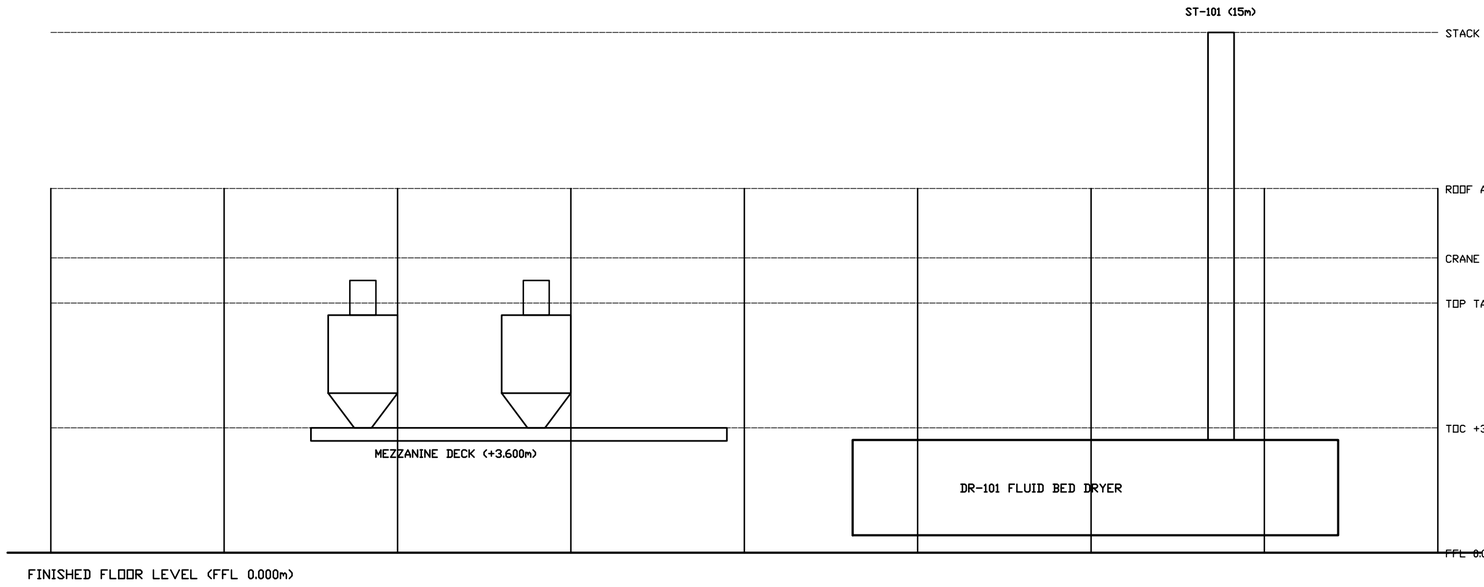

MASTER EQUIPMENT SCHEDULE & OPERATING WEIGHTS:

TK-001: Raw Grain Silo (50 MT)
Dim: Dia 4,500 x 6,500 | Elev: 0.000m
Weight: 58,500 kg | Power: 2.2 kW | MOC: Carbon Steel

CV-101: Bucket Elevator
Dim: 1,000 x 1,200 x 9,000 | Elev: 0.000m
Weight: 1,850 kg | Power: 3.7 kW | MOC: SS304 Contact

SC-100: Grain Cleaner & Destoner
Dim: 2,200 x 1,400 x 1,600 | Elev: 0.000m
Weight: 950 kg | Power: 2.2 kW | MOC: SS304 Casing

TK-101A: Soak Vessel A (7.5 m3)
Dim: Dia 2,000 x 3,450 | Elev: +3.600m
Weight: 9,850 kg | Power: 4.0 kW | MOC: AISI SS316L

TK-101B: Soak Vessel B (7.5 m3)
Dim: Dia 2,000 x 3,450 | Elev: +3.600m
Weight: 9,850 kg | Power: 4.0 kW | MOC: AISI SS316L

SK-100: Chemical Dosing Skid
Dim: 2,400 x 1,400 x 1,900 | Elev: +3.600m
Weight: 1,450 kg | Power: 1.5 kW | MOC: HDPE / SS316L

SC-101: Dewatering Screen
Dim: 3,000 x 1,200 x 1,200 | Elev: +3.600m
Weight: 1,250 kg | Power: 3.0 kW | MOC: AISI SS316L

DR-101: Fluid Bed Dryer
Dim: 14,000 x 1,000 x 2,800 | Elev: 0.000m
Weight: 6,850 kg | Power: 6.0 kW | MOC: AISI SS304

HE-101: Steam Air Heater
Dim: 1,800 x 1,200 x 1,500 | Elev: 0.000m
Weight: 1,200 kg | Power: N/A | MOC: Al-Finned SS

BL-101: Primary Air Blower
Dim: 1,600 x 1,400 x 1,400 | Elev: 0.000m
Weight: 680 kg | Power: 18.5 kW | MOC: Carbon Steel

CY-101: Cyclone Separators (2x)
Dim: Dia 1,200 x 4,000 | Elev: 0.000m
Weight: 1,700 kg | Power: N/A | MOC: AISI SS304

BF-102: Dust Collector Baghouse
Dim: 2,800 x 2,200 x 4,800 | Elev: 0.000m
Weight: 2,450 kg | Power: N/A | MOC: Carbon Steel

PK-101: Packaging Machine Line
Dim: 4,500 x 2,000 x 3,200 | Elev: 0.000m
Weight: 3,200 kg | Power: 7.5 kW | MOC: AISI SS304

EV-101: Triple Effect ZLD Evap
Dim: 7,500 x 3,000 x 4,500 | Elev: 0.000m
Weight: 5,500 kg | Power: 11.0 kW | MOC: AISI SS316L

TR-01: Substation Transformer
Dim: 2,200 x 1,600 x 2,000 | Elev: 0.000m
Weight: 2,800 kg | Power: 500 kVA | MOC: Oil Immersed

DG-01: Standby Generator Yard
Dim: 3,500 x 1,500 x 2,200 | Elev: 0.000m
Weight: 3,500 kg | Power: 200 kW | MOC: Acoustic Encl

DESIGN CODES & CIVIL STANDARDS:

1. Civil Foundation: Safe bearing capacity 180 kN/m2 | IS 456 M25 grade concrete.
2. Structural Steel: IS 800:2007 | Columns ISMB 400 | Mezzanine Beams ISMB 300.
3. Design Loads: Process Mezzanine: 7.5 kN/m2 | Ground Floor: 25.0 kN/m2.
4. Total Operating Equipment Weight: 111.6 Tonnes (including grain & liquor fill).
5. Total Plant Structural Steel Weight: 27.08 Tonnes (Platforms, Ladders, Handrails).
6. Safety & Ergonomics: OSHA 1910.29 compliant walkways (1,000mm clear width).

FINNOAQ AGRO-INDUSTRIAL TECHNOLOGIES LTD.
15,000 kg/day Split Pigeon Pea Optimization Greenfield Project

PLANT GENERAL ARRANGEMENT MASTER LAYOUT
DISCIPLINE: GENERAL ARRANGEMENT | LEAD: SOURISH SENAPATI | GUIDANCE: DR. ARCHISMAN RAY (IIT KGP)

DWG NO: DWG-FIN-15T-014	REV: V8.0	SHEET: 13 OF 13
SCALE: AS SHOWN DATE: 2026-10-17	STATUS: PRELIMINARY	GATE: G-A HOLD

CONCEPTUAL FEED – PRELIMINARY – NOT FOR CONSTRUCTION / NOT FOR PROCUREMENT | COPYRIGHT FINNOAQ