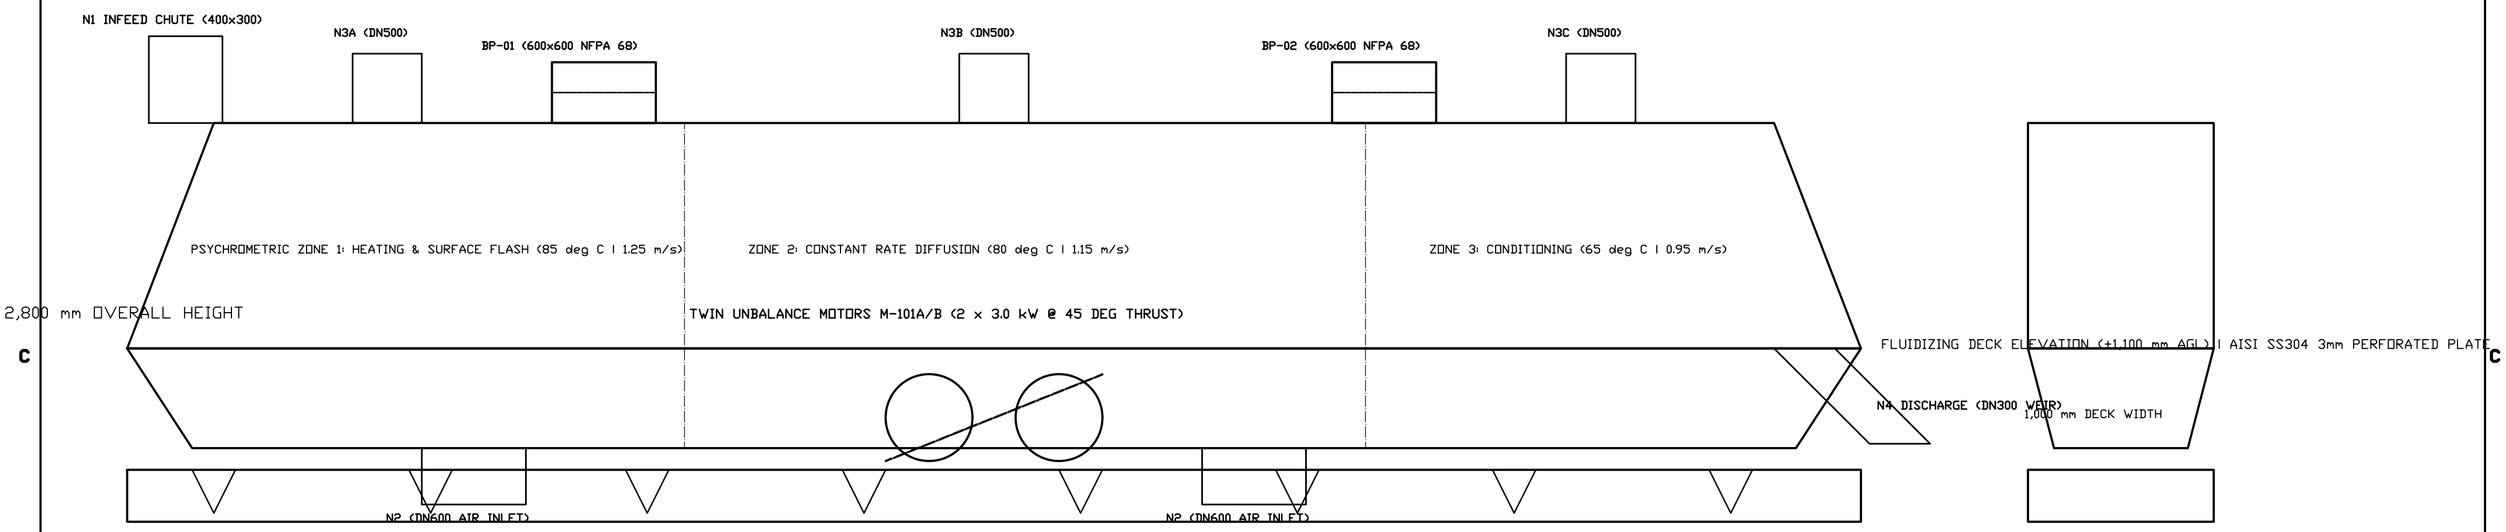


MARK	SERVICE	SIZE	RATING	FACING	LOCATION
N1	Moist Dal Infeed	400x300	FLANGED	FLAT FACE	Top Hood Infeed End
N2A/B	Hot Air Supply	2x DN600	150#	RAISED FACE	Bottom Plenum Underside
N3A-C	Exhaust Air Outlets	3x DN500	150#	FLAT FACE	Top Hood Crown
N4	Dry Dal Discharge	DN300	150#	RAISED FACE	Discharge End Retention Weir
N5	Plenum Fines Drain	DN100	150#	RAISED FACE	Plenum Invert Low Point
M1-M4	Inspection Doors	4x 500x400	HINGED	FOOD GASKET	Drive & Non-Drive Sides
BP-01/02	NFPA 68 Burst Panels	2x 600x600	SS COMPOSITE	ROOF DUCTED	Expansion Hood Crown

MECHANICAL, VIBRATION DYNAMICS & NFPA 68 SAFETY SPECIFICATION:

1. Equipment Tag: DR-101 | Service: Continuous Vibrating Fluid Bed Dal Conditioning & Drying.
2. Effective Deck Dimensions: 14,000 mm Length x 1,000 mm Width (Effective Area: 14.0 m2).
3. Material of Construction: All product contact parts SS304 (Ra < 0.8 um sanitary polish). Non-contact IS2062 CS.
4. Fluidizing Air Rate: 14,150 kg/h (11,800 m3/h @ 85 deg C) | Superficial Velocity: 1.15 m/s (Umf = 0.85 m/s).
5. Water Evaporation Duty: 412.34 kg/h H2O | Thermal Heating Duty: 512.4 kWth via Steam Coil HE-101.
6. Vibration Dynamics: Stroke amplitude 3.5 mm @ 16 Hz (960 RPM); Twin unbalance motors 2 x 3.0 kW @ 45 deg.
7. Isolation Efficiency: 8x Heavy-duty helical coil springs with rubber snubbers (>96% dynamic isolation).
8. Residence Time: 18.0 - 22.0 minutes plug-flow with adjustable discharge overflow retention weir.
9. NFPA 68 EXPLOSION RELIEF: Dual 600x600 mm composite rupture panels (Pred = 0.2 bar g, Pstat = 0.1 bar g).
   - Sized for St-1 Agricultural Pulse Dust (Kst = 85 bar-m/s, Pmax = 7.8 bar g) with ducted vent to building exterior.
10. Safety Hold: Final dynamic balancing, spring resonance validation and FAT testing required prior to site release.

FINNOAQ AGRO-INDUSTRIAL TECHNOLOGIES LTD.
15,000 kg/day Split Pigeon Pea Optimization Greenfield Project

EQUIPMENT GENERAL ARRANGEMENT - FLUID BED DRYER DR-101
DISCIPLINE: MECHANICAL | LEAD: SOURISH SENAPATI | GUIDANCE: DR. ARCHISMAN RAY (IIT KGP)

DWG NO: DWG-FIN-15T-008	REV: V8.0	SHEET: 8 OF 12
SCALE: AS SHOWN DATE: 2026-10-17	STATUS: PRELIMINARY	GATE: G-A HOLD

CONCEPTUAL FEED - PRELIMINARY - NOT FOR CONSTRUCTION / NOT FOR PROCUREMENT | COPYRIGHT FINNOAQ